



LFC008 LT. COMMERCIAL • 5YR LED EMERGENCY PACK - 8W LED STEALTH™ FULL CUTOFF WALL PACKS

FEATURES

- Split-type external LiFeP04 battery
- Test switch indicator light
- Meets or exceeds safety standards UL 924 and CSA C22.2 No. 141

APPLICATION

For use with LED fixture drivers that are 150W or less.

INPUT

Input Power	7W Max.
Input Current	100mA Max.
Input Voltage	120-277V, 50/60Hz

OUTPUT

Output Power	8W
Output Current	200-400mA
Output Voltage	25-48Vdc
Over Charge Protection	Yes
Over Discharge Protection	Yes
Short Circuit Protection	Yes

PERFORMANCE

Emergency Time	90 Mins.
Recharge Time Required	24 Hours
Battery Type	LiFeP04 6.4V/3000mAh
Battery Charging Current	250mA

ENVIRONMENT

Ambient Temperature	32° ~ 140° F
Suitable Location	DAMP

LIFESPAN

Warranty (Years)	5
------------------	----------

QUALIFICATIONS

Model Number	BLD-CM20N-480800-8W
--------------	---------------------




Specifications are subject to change without notice.

LFC008 LT. COMMERCIAL • 5YR LED EMERGENCY PACK - 8W



DIMENSIONS (Inches)	DRIVER	BATTERY
Length	7.4"	6.1"
Width	1.5"	1.2"
Height	1.1"	1.2"
Net Weight (Lbs)	0.9	

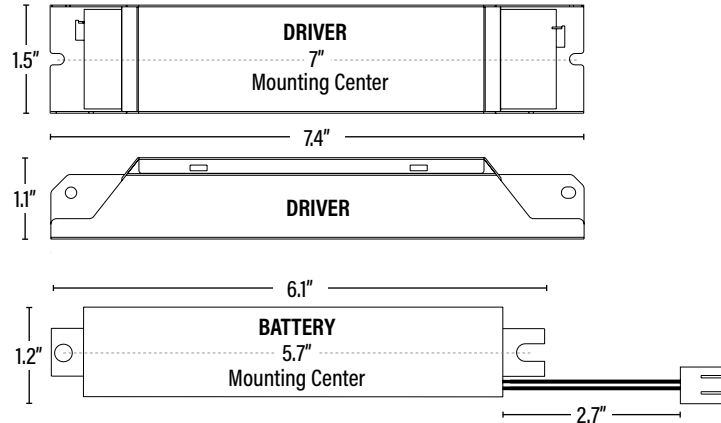

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	20	10811768024040	13.6" x 8.7" x 8.1"	19.1
Individual Box	1	811768024043	--	1
Country of Origin	China			
HS Tariff	--			

ORDERING

ITEM#	DESCRIPTION	CASE
LFC008	EM BATTERY FOR LED STEALTH™ FULL CUTOFF WALL PACK 8W/90 MIN/120-277V	20

ADDITIONAL INFORMATION:

- For use with LED fixture drivers that are 150W or less.
- Use with grounded fixtures in dry or damp locations only.
- This LED Emergency Backup unit requires an un-switched AC power source of 120-277V, 50/60Hz
- The fixture's AC driver must be on the same branch circuit as the LED Emergency Backup unit.