



# CWPX12 XTREME DUTY • 7YR LED SPEC-SELECT™ WALL PACK OUTDOOR NON-CUTOFF AND SEMI-CUTOFF WALL-MOUNTED AREA LUMINARIES

### **FEATURES**

- Adjustable wattage and color temperature.
- · Replaces traditional HID wall packs.
- · Durable, die casting housing.
- Powder coat finish, corrosion and weather resistant.
- Sealed to keep out moisture and environmental contaminants.

### **APPLICATION**

Ideal for security, walkways and perimeter lighting.

### **ELECTRICAL**

Wattage	80W / 100W / 120W
Voltage	120-277V
Power Factor	0.9
Total Harmonic Distortion (THD)	

### **LIGHTING PERFORMANCE**

Lumens	10000-15000	
Lumens Per Watt (Lm/W)	125	
Color Temperature (CCT)	3000K / 4000K / 5000K	
Color Rendering (CRI)	80	
R9 (Red Value)		
R13 (Skin Tones)		
Beam Angle	110° x 105°	
Light Distribution		
BUG Rating (Backlight, Uplight, and Glare)		
Dimmable Lighting Control		

### **ENVIRONMENT**

Operating Temperature	-40° ~ 104°F
Suitable Location	WET
Ingress Protection Rating	IP65

### LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	7

### **COMPONENTS**

LED Light Source	
Driver	ARC-DI-6011450 (2 ea.)

# CONSTRUCTION

Housing	Die Cast Aluminum	
Lens	Tempered Glass	
Base / Power Supply	Hard Wired	
Finish	Bronze	

### **QUALIFICATIONS**

Model Number SSWP-C-FSC1-1-MV-BRZ




Manufactured by P.Q.L., Inc. · Published lumens on LED products are approximate and may vary slightly. · Specifications are subject to change without notice.

# **CWPX12** XTREME DUTY • 7YR LED SPEC-SELECT™ WALL PACK



### DIMENSIONS (Inches)

DINIENSIONS (inches)	
Length	18.4"
Width	9.4"
Height	9.1′
Weight (Lbs)	

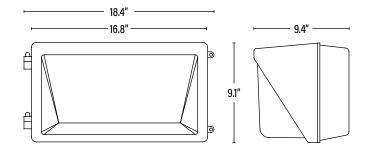

PACKAGING		UPC	<b>DIMENSIONS</b> (LxWxH)	<b>GROSS WEIGHT</b> (Lbs)
Master Carton	1	811768024739	18.8" x 11" x 11.4"	14.3
Country of Origin	China			
HS Tariff	9405.10.6020			

### **ORDERING**

ITEM#	DESCRIPTION	CASE
CWPX12	LED SPEC-SELECT™ WALL PACK/80-100-120W/30-50K/120-277V/BRZ	1

Manufactured by P.Q.L., Inc. - Manufacturer Model # SSWP-C-FSC1-1-MV-BRZ

# **ADDITIONAL INFORMATION:**

**Note:** To prevent water damage which may shorten the life of an exterior mounted fixture; the fixture should be properly weather sealed according to the installation instructions or between the fixture base and mounting surface. Damage due to improper installation may void the warranty.