



LR6494 STANDARD • 5YR LED CFL DIRECT INSTALL

FOUR PIN-BASE REPLACEMENT LAMPS FOR CFLS - VERTICALLY-MOUNTED LAMPS

FEATURES


- PLUG & GO™ works with compatible electronic ballast
- Easy installation
- Vertical mounting

APPLICATION

Ideal for retrofitting 18W-42W 4 pin CFL G24 lamps frequently used in downlights and sconces.

*Not suitable for use with emergency ballast or signs.

LIGHT DISTRIBUTION CURVE



ELECTRICAL	LAMP SYSTEM POWER		
Wattage	9W 11W		
Voltage	120-277V		
Power Factor	0.87		
Total Harmonic Distortion (THD)	20.6		
LIGHTING PERFORMANCE			
Lumens	900		
Lumens Per Watt (Lm/W)	82		
Color Temperature (CCT)	4000K		
Color Rendering (CRI)	83		
R9 (Red Value)	N/A		
R13 (Skin Tones)	N/A		
Beam Angle	120°		
Light Distribution	Type VS		
Dimmable Lighting Control	Dimmable with dimming ballast		
ENVIRONMENT			
Operating Temperature	-4° ~ 113°F		
Suitable Location	DAMP		
Ingress Protection Rating	IP20		
Suitable Fixture Style	Enclosed		
LIFESPAN			
Average Life (Hours)	50,000		
Warranty (Years)	5		
COMPONENTS			
LED Light Source	N/A		
CONSTRUCTION			
Housing	PC		
Base / Power Supply	G24q 4 Pin / Plug In		
Finish	White		
QUALIFICATIONS			
Manufacturer Model #	90471		
(I) RoHS			

Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.


LR6494 STANDARD • 5YR LED CFL DIRECT INSTALL



•			10	-					
	ΙW	11-1	u 🖜		NS	/	nn	nnel	
v	111		13	w	113	u	IIICI	1621	

Length	3.7"
Width/Diameter	2.1"
Height	1.8"
Weight (Lbs)	

Line drawings may not be to scale and are for general reference only.

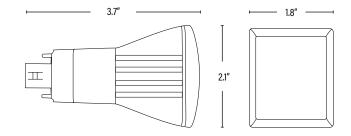

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	50	10811768028062	20.5" x 12.6" x 5.5"	16.4
Inner Carton	10	20811768028069		
Individual Box	1	811768028065	4.1" x 2.2" x 1.8"	0.33
Country of Origin	China			
HS Tariff	9405.40.8200			

ORDERING

ITEM#	DESCRIPTION	CASE
LR6494	LED 9W/G24q/4 PIN/DI/40K/120-277V/V/90471	10/50

Manufactured by P.Q.L., Inc. - Manufacturer Model # 90471