



## CV2205 XTREME DUTY • 7YR LED 24" VAPOR TIGHT

**DIRECT LINEAR AMBIENT LUMINARIES** 

### FEATURES

- · Low-profile which meets limitless range of applications.
- Use 30% less energy than a linear fluorescent fixtures.
  100% UV stabilized polycarbonate housing and diffusers
- eliminates glare and produces even light distribution. • Liquid silicone perimeter gasket
- Liquiu sincone permeter ga
- Stainless steel clips.

### MOUNTING

Designed for surface and suspended mounting.

### **APPLICATION**

Ideal for parking garages, cold storage, food processing facilities, dusty and wet environments.

ELECTRICAL			
Wattage	20W		
Voltage	120-277V		
Current	0.17-0.07A		
Power Factor	0.9		
Total Harmonic Distortion (THD)	10		
LIGHTING PERFORMANCE			
Lumens	2620		
Lumens Per Watt (Lm/W)	131		
Color Temperature (CCT)	5000K		
Color Rendering (CRI)	82		
R9 (Red Value)			
R13 (Skin Tones)			
Beam Angle	120°		
Light Distribution	Type VS		
BUG Rating (Backlight, Uplight, and Glare)	B1 - U3 - G1		
Dimmable Lighting Control	<b>(Dimmable</b> 0-10V, Range 10% - 100%		
ENVIRONMENT			
Operating Temperature	-40° ~ 122°F		
Suitable Location	WET		
Ingress Protection Rating	IP65		
LIFESPAN			
Average Life (Hours)	50,000		
Warranty (Years)	7		
COMPONENTS			
LED Light Source	Seoul 3528		
Driver	SIE23-I420		
CONSTRUCTION			
Housing	Polycarbonate		
Base / Power Supply	Hard Wired		
Finish	White		
QUALIFICATIONS			
Manufacturer Model #	55372		
CERTIFIED			


Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.

# CV2205 XTREME DUTY • 7YR LED 24" VAPOR TIGHT



#### **DIMENSIONS** (Inches)

Length	23.6″
Width/Diameter	3.5″
Height	3.1″
Weight (Lbs)	

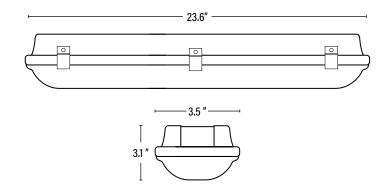

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	4	10899645001377	25.8" x 8.5" x 7.1"	11.6
Individual Box	1	899645001370		2.9
Country of Origin	China			
HS Tariff	9405.10.6020			

#### ORDERING

ITEM#	DESCRIPTION	CASE		
CV2205	LED VAPOR TIGHT 24" 20W/50K/FR LENS/120-277V/DIMMABLE/V2	4		

Manufactured by P.Q.L., Inc. - Manufacturer Model # 55372