



**CR6594** LT. COMMERCIAL • 7YR  
**LED CFL DIRECT INSTALL**  
FOUR PIN-BASE REPLACEMENT LAMPS FOR  
CFLS • HORIZONTALLY-MOUNTED LAMPS

**FEATURES**


- PLUG & GO™ - works with compatible electronic ballast
- Easy installation
- Horizontal mounting

**APPLICATION**

Ideal for retrofitting 18W-42W 4 pin CFL G24 lamps frequently used in downlights and sconces.

*\*Not suitable for use with emergency ballast or signs.*

**LIGHT DISTRIBUTION CURVE**

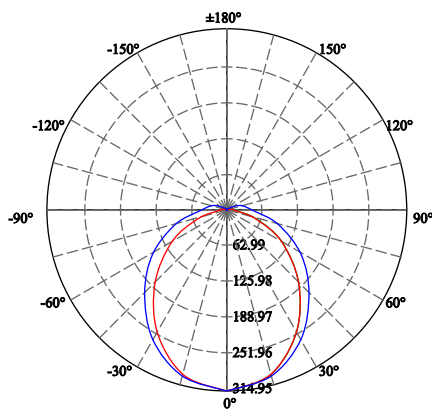

**ELECTRICAL**

	LAMP	SYSTEM POWER
Wattage	9W	11W
Voltage	120-277V	
Power Factor	0.87	
Total Harmonic Distortion (THD)	24.5	

**LIGHTING PERFORMANCE**

Lumens	850
Lumens Per Watt (Lm/W)	77
Color Temperature (CCT)	4000K
Color Rendering (CRI)	83
R9 (Red Value)	N/A
R13 (Skin Tones)	N/A
Beam Angle	120°
Light Distribution	Type VS
Dimmable Lighting Control	<i>Dimmable</i> with dimming ballast

**ENVIRONMENT**

Operating Temperature	-4° ~ 113°F
Suitable Location	<b>DAMP</b>
Ingress Protection Rating	IP20
Suitable Fixture Style	Enclosed

**LIFESPAN**

Average Life (Hours)	50,000
Warranty (Years)	<b>7</b>

**COMPONENTS**

LED Light Source	N/A
------------------	-----

**CONSTRUCTION**

Housing	PC
Base / Power Supply	G24q 4 Pin / Plug In
Finish	White

**QUALIFICATIONS**

Manufacturer Model #	90475
----------------------	-------



*Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.*


# CR6594 LT. COMMERCIAL • 7YR LED CFL DIRECT INSTALL



### DIMENSIONS (Inches)

Length	5.2"
Width/Diameter	1.6"
Height	1"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

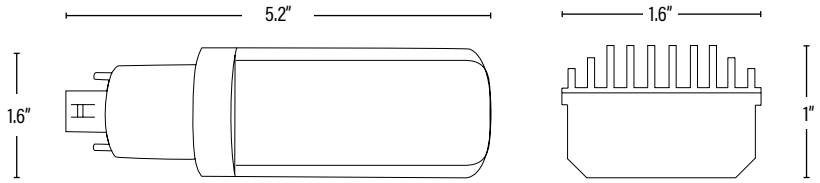

### PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	50	10811768027218	30.3" x 9.4" x 3.7"	16.4
Inner Carton	10	20811768027215	--	--
Individual Box	1	811768027211	5.7" x 1.6" x 1.3"	0.34
Country of Origin	China			
HS Tariff	9405.40.8200			

### ORDERING

ITEM#	DESCRIPTION	CASE
CR6594	LED 9W/G24q/4 PIN/DI/40K/120-277V/H	10/50

Manufactured by P.Q.L., Inc. - Manufacturer Model # 90475

PERFORMANCE DATA

PACKAGING