



**LBFL24** COMMERCIAL DUTY • 5YR  
**LED SPEC-SELECT™ BOLLARD HEAD**  
OUTDOOR DECORATIVE LIGHTING

**FEATURES**

- Adjustable wattage (3 settings)
- Adjustable light color (3 settings)
- Contemporary design
- Corrosion resistant exterior
- Easy installation, switchable bollard heads
- Integrated photocell with On/Off switch

**APPLICATION**

Versatile decorative lighting for residential, industrial and commercial applications. Commonly used to illuminate walkways, entrances, or driveways for added safety and security.

\* Requires bollard tube/base (#BDBASE)

**ELECTRICAL**

Wattage	14W / 19W / 24W
Voltage	120-277V
Power Factor	0.9
Total Harmonic Distortion (THD)	--

**LIGHTING PERFORMANCE**

Lumens	1750 / 2300 / 3000
Lumens Per Watt (LPW)	125
Color Temperature (CCT)	3000K / 4000K / 5000K
Color Rendering (CRI)	70
Beam Angle	360°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B1 - U3 - G2
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

**ENVIRONMENT**

Operating Temperature	-40° ~ 122°F
Suitable Location	<b>WET</b>
Ingress Protection Rating	IP65

**LIFESPAN**

Average Life (Hours)	50,000
Warranty (Years)	<b>5</b>

**COMPONENTS**

LED Light Source	Bridgelux
Driver	IS030062035-32F

**CONSTRUCTION**

Housing	Die cast Aluminum
Lens	Clear
Base / Power Supply	Hard Wired
Finish	Bronze

**QUALIFICATIONS**

Model Number	BLRD-RL-14/19/24W-3CCT-PC
--------------	---------------------------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.


# LBFL24 COMMERCIAL DUTY • 5YR LED SPEC-SELECT™ BOLLARD HEAD



ITEM INFORMATION

**DIMENSIONS** (Inches)

Width/Diameter	6.3"
Height (With round base)	42"
Net Weight (Lbs)	--

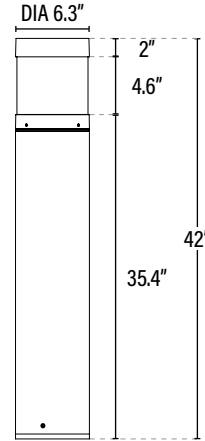

\* Base sold separately.

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	4	10811768025054	16.9" x 16.9" x 13.6"	21.7
Individual Box	1	811768025057	8.1" x 8.1" x 12.8"	5.4
Country of Origin	China			
HS Tariff	9405.11.6020			

**ORDERING**

ITEM#	DESCRIPTION	CASE
LBFL24	LED SPEC-SELECT™ BOLLARD ROUND/FLAT TOP/LOUVER/14-19-24W/30-40-50K/DIMM/120-277V/BRZ/PC	4

Manufactured by P.Q.L., Inc. - Manufacturer Model # BLRD-RL-14/19/24W-3CCT-PC

**ACCESSORIES** (Base required to complete installation.)

BDBASE	LED SPEC-SELECT™ BOLLARD ROUND BASE/BRZ	1
--------	---	---

**ADDITIONAL INFORMATION:**

• The wattage, color temperature and photocell option may be selected by dip switches location on the bottom of the bollard head. Refer to install instructions for additional information.