



**LFLX20 COMMERCIAL DUTY • 5YR
LED SPEC-SELECT™ FLOOD LIGHT**

FEATURES

- Adjustable wattage and color temperature.
- Integrated photocell with On/Off switch.
- Corrosion resistant die cast housing, with a powder paint coat finish.
- Compact design.
- Fixture angle can be easily adjusted.

APPLICATION

Ideal for wall washing, landscaping lighting, outdoor advertising and parking lots.

ELECTRICAL

| | |
|---------------------------------|--------------------|
| Wattage | 100W / 150W / 200W |
| Voltage | 120-277V |
| Power Factor | 0.9 |
| Total Harmonic Distortion (THD) | 20 |

LIGHTING PERFORMANCE

| | |
|--|--|
| Lumens | 15000 / 22500 / 30000 |
| Lumens Per Watt (LPW) | 150 |
| Color Temperature (CCT) | 3000K / 4000K / 5000K |
| Color Rendering (CRI) | 80 |
| R9 (Red Value) | 5 |
| R13 (Skin Tones) | -- |
| Beam Angle | 7H x 7V |
| Light Distribution | Type VS |
| BUG Rating (Backlight, Uplight, and Glare) | B4 - Ux - G2 |
| Dimmable Lighting Control | <i>Dimmable</i> 0-10V, Range 10% - 100% |

ENVIRONMENT

| | |
|---------------------------|-------------|
| Operating Temperature | -4° ~ 104°F |
| Suitable Location | WET |
| Ingress Protection Rating | IP65 |

LIFESPAN

| | |
|----------------------|----------|
| Average Life (Hours) | 50,000 |
| Warranty (Years) | 5 |

COMPONENTS

| | |
|------------------|--|
| LED Light Source | -- |
| Driver | Premium Electronics with 6kV/4kV Surge Protection |

CONSTRUCTION

| | |
|---------------------|-------------------|
| Housing | Die Cast Aluminum |
| Lens | PC |
| Base / Power Supply | Hard Wired |
| Finish | Bronze |

QUALIFICATIONS

| | |
|----------------------|-------|
| Manufacturer Model # | 84363 |
|----------------------|-------|




Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.

LFLX20 COMMERCIAL DUTY • 5YR LED SPEC-SELECT™ FLOOD LIGHT



ITEM INFORMATION

| DIMENSIONS (Inches) | |
|---------------------|-------|
| Length | 13.4" |
| Width | 3.4" |
| Height | 10" |
| Weight (Lbs) | -- |

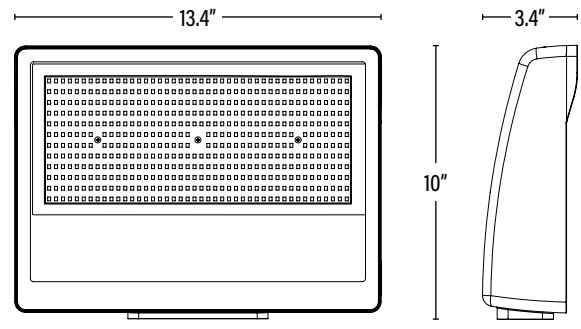

| PACKAGING | UPC | DIMENSIONS (LxWxH) | GROSS WEIGHT (Lbs) | |
|-------------------|--------------|--------------------|----------------------|----|
| Master Carton | 1 | 811768021752 | 16.3" x 5.2" x 11.9" | -- |
| Country of Origin | China | | | |
| HS Tariff | 9405.11.6020 | | | |

| ORDERING | | |
|--|--|------|
| ITEM# | DESCRIPTION | CASE |
| LFLX20 | LED SPEC-SELECT™ FLOOD/100-150-200W/30-40-50K/DIMM/120-277V/BRZ/PC | 1 |
| <i>Manufactured by P.Q.L., Inc. - Manufacturer Model # 84363</i> | | |
| ACCESSORIES | | |
| LFLXTN | SLIP FITTER MOUNT ONLY FOR LED FLOOD LIGHT/BRZ | 6 |
| LFLXUB | U-MOUNT ONLY FOR LED FLOOD LIGHT/BRZ | 20 |