



LV2205 LT. COMMERCIAL • 5YR
LED 24" VAPOR TIGHT
DIRECT LINEAR AMBIENT LUMINARIES

FEATURES

- Low-profile which meets limitless range of applications.
- Use 30% less energy than a linear fluorescent fixtures.
- 100% UV stabilized polycarbonate housing and diffusers eliminates glare and produces even light distribution.
- Liquid silicone perimeter gasket
- Stainless steel clips.

MOUNTING

Designed for surface and suspended mounting.

APPLICATION

Ideal for parking garages, cold storage, food processing facilities, dusty and wet environments.

ELECTRICAL

Wattage	20W
Voltage	120-277V
Current	0.17-0.07A
Power Factor	0.9
Total Harmonic Distortion (THD)	10

LIGHTING PERFORMANCE

Lumens	2620
Lumens Per Watt (Lm/W)	131
Color Temperature (CCT)	5000K
Color Rendering (CRI)	82
R9 (Red Value)	--
R13 (Skin Tones)	--
Beam Angle	120°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B1 - U3 - G1
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-40° ~ 122°F
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Seoul 3528
Driver	SIE23-I420

CONSTRUCTION

Housing	Polycarbonate
Base / Power Supply	Hard Wired
Finish	White

QUALIFICATIONS

Manufacturer Model #	55372
----------------------	-------



Manufactured by P.Q.L., Inc. - Published lumens on LED products are approximate and may vary slightly. - Specifications are subject to change without notice.


LV2205 LT. COMMERCIAL • 5YR
LED 24" VAPOR TIGHT



ITEM INFORMATION

DIMENSIONS (Inches)

Length	23.6"
Width/Diameter	3.5"
Height	3.1"
Weight (Lbs)	--

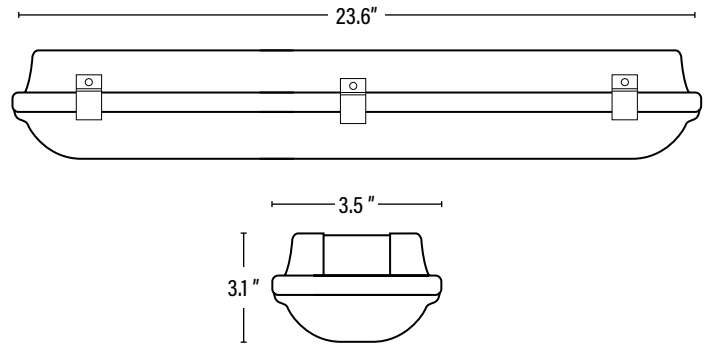

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	4	10899645001377	25.8" x 8.5" x 7.1"	11.6
Individual Box	1	899645001370	--	2.9
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
LV2205	LED VAPOR TIGHT 24" 20W/50K/FR LENS/120-277V/DIMMABLE/V2	4

Manufactured by P.Q.L., Inc. - Manufacturer Model # 55372