



**CR3245 XTREME DUTY • 7YR
LED HIGH WATTAGE 360° LAMP**
REPLACEMENT LAMPS FOR OUTDOOR POLE/ARM
MOUNTED DECORATIVE LUMINAIRES (TYPE B)


FEATURES

- Environmentally friendly; uses less energy than a traditional lamp.
- 360° optical design that provides even light distribution.
- High Voltage Surge Protection (6KV).
- Hollow heat sink for increased cooling air flow.
- High lumen output.
- Silicone gaskets.

APPLICATION

Replacement lamps for top post, high bays, parking lots and street lighting.

LIGHT DISTRIBUTION CURVE

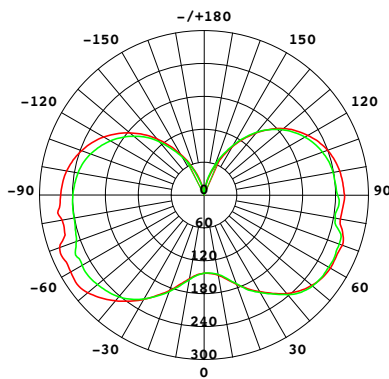

ELECTRICAL

Wattage	22W
Voltage	120-277V
Current	0.22A
Power Factor	0.9
Total Harmonic Distortion (THD)	--

LIGHTING PERFORMANCE

Lumens	2860
Lumens Per Watt (Lm/W)	130
Color Temperature (CCT)	5000K
Color Rendering (CRI)	80
R9 (Red Value)	N/A
R13 (Skin Tones)	N/A
Beam Angle	360°
Light Distribution	Type VS
Dimmable Lighting Control	

ENVIRONMENT

Operating Temperature	-40° ~ 122°F
Suitable Location	DAMP
Ingress Protection Rating	IP63
Suitable Fixture Type	Enclosed

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	7

COMPONENTS

LED Light Source	JuFei 2835
------------------	------------

CONSTRUCTION

Housing	Aluminum / PC
Lens	Clear
Base / Power Supply	E26 - Medium

QUALIFICATIONS

Manufacturer Model #	91576
----------------------	-------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.

PERFORMANCE DATA

PACKAGING


CR3245 XTREME DUTY • 7YR LED HIGH WATTAGE 360° LAMP



DIMENSIONS (Inches)

Length (MOL)	7.1"
Width/Diameter (MOD)	2.4"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

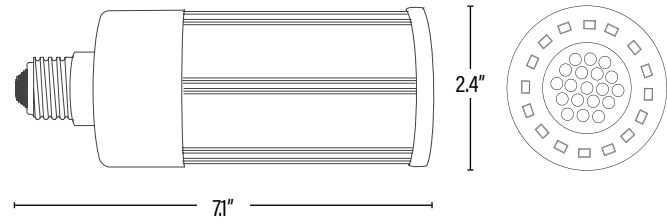

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	12	10811768029601	13.3" x 10" x 10.1"	--
Individual Box	1	811768029604	3.1" x 3.1" x 9.3"	--
Country of Origin	China			
HS Tariff	9405.40.8200			

ORDERING

ITEM#	DESCRIPTION	CASE
CR3245	LED 22WT19/360°/CL/50K/MED/120-277V	12

Manufactured by P.Q.L., Inc. - Manufacturer Model # 91576

ADDITIONAL INFORMATION:

TOP VIEW



PERFORMANCE DATA

PACKAGING