



PREMIUM QUALITY LIGHTING®

C25144 - XTREME DUTY 8yr
L25144 - Lt. Commercial 5yr

LED CEILING LIGHT

TECHNICAL DATA SHEET

FEATURES



LED ceiling light provides glare free illumination and even light distribution with a clean, modern look. Designed with the lasted solid state lighting and electronic driver for optimal performance and energy efficiency.

- Die formed cold rolled steel; painted with a treatment for anti-corrosion.
- Diffusing lens
- TRIAC dimming on 0-10v dimmers
- IP20


APPLICATION

Offices, hallways, malls, hospitals, airports, lobbies and other residential and commercial applications.

SPECIFICATIONS	
Power Consumption	25W
Input Voltage	120V
Power Factor	0.8
Lumens	1700
Luminous Efficiency	68 Lm/W
Color Temperature	4000K
CRI	80
Beam Angle	120°
Finish	White
Dimensions (Inches)	13.8"(DIA) x 4.4"(H)
LIFESPAN & ENVIRONMENT	
Average Life	25,000
Operating Temperature	-20°C ~ 40°C



DIMENSIONS

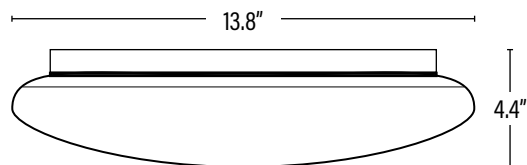

DIMMER COMPATIBILITY

LUTRON	LEVITON
LGCL-153PLH-WH	6674
SCL-153PR- WH	IPL06
	6631

ORDERING

ITEM#	DESCRIPTION	WATTS	COLOR	LUMENS	CRI	VOLTS	HOURS	CASE
C/L25144	LED 25W 14" WHITE MUSHROOM CEILING LIGHT/40K/120V/DIMMABLE 83756	25	4000K	1700	80	120	35,000	5