



## CF0606 XTREME DUTY • 7YR LED LOW PROFILE CANOPY FUEL PUMP CANOPY LUMINAIRES

### FEATURES

- Thin low-profile design.
- Easy surface mounting.

### APPLICATION

Ideal for retrofitting inefficient outdoor fixtures.

### ELECTRICAL

Wattage	75W
Voltage	100-277V
Current	0.75A
Power Factor	0.9
Total Harmonic Distortion (THD)	15

### LIGHTING PERFORMANCE

Lumens	9300
Lumens Per Watt (Lm/W)	124
Color Temperature (CCT)	5000K
Color Rendering (CRI)	80
R9 (Red Value)	8
R13 (Skin Tones)	83
Beam Angle	110°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B3 - U3 - G1
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

### ENVIRONMENT

Operating Temperature	-22° ~ 122°F
Suitable Location	<b>WET</b>
Ingress Protection Rating	IP65

### LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	<b>7</b>

### COMPONENTS

LED Light Source	Samsung 2835
Driver	Sosen SS-100E-58B

### CONSTRUCTION

Housing	Aluminum
Lens	Tempered Glass
Base / Power Supply	Hard Wire
Finish	White

### QUALIFICATIONS

Manufacturer Model #	90004
----------------------	-------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.


# CF0606 XTREME DUTY • 7YR LED LOW PROFILE CANOPY



## DIMENSIONS (Inches)

Length	15"
Width/Diameter	15"
Height	2.7"
Weight (Lbs)	10

Line drawings may not be to scale and are for general reference only.

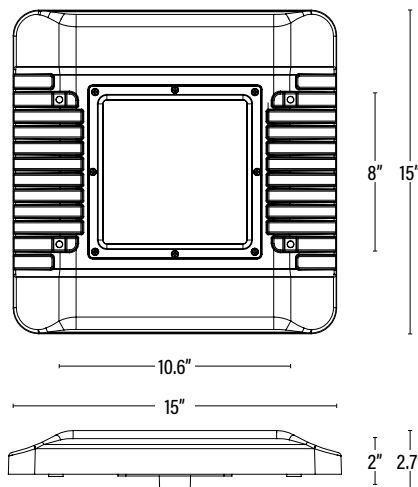

## PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	811768024982	17.4" x 16.5" x 16.5"	12.6
Country of Origin	China			
HS Tariff	9405.10.6020			

## ORDERING

ITEM#	DESCRIPTION	CASE
CF0606	LED LOW PROFILE CANOPY 75W/50K/100-277V/DIMMABLE	1

Manufactured by P.Q.L., Inc. - Manufacturer Model # 90004

## ADDITIONAL INFORMATION:

**Note:** To prevent water damage which may shorten the life of an exterior mounted fixture; the fixture should be properly weather sealed according to the installation instructions or between the fixture base and mounting surface. Damage due to improper installation may void the warranty.