



## CF3334 XTREME DUTY • 7YR LED 2X2 RECESSED TROFFER

2X2 LUMINARIES FOR AMBIENT LIGHTING OF  
INTERIOR COMMERCIAL SPACES

### FEATURES

- Troffer is ideal for all commercial and industrial buildings requiring general illumination with recessed configurations.
- Low-profile which meets limitless range of applications.
- Use 30% less energy than a linear fluorescent fixture.
- Smooth edges for easy handling.
- Diffusing lens gives soft even lights.

### MOUNTING

- Recessed ceiling mount
- Exposed T-grid ceiling

### APPLICATION

Ideal for offices, retail, commercial buildings and work areas.

### ELECTRICAL

Wattage	34W
Voltage	120-277V
Power Factor	0.9
Total Harmonic Distortion (THD)	10

### LIGHTING PERFORMANCE

Lumens	3400
Lumens Per Watt (Lm/W)	100
Color Temperature (CCT)	4000K
Color Rendering (CRI)	80
R9 (Red Value)	11.9
R13 (Skin Tones)	85.9
Beam Angle	100°
Light Distribution	Type VS
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

### ENVIRONMENT

Operating Temperature	-4° ~ 122°F
Suitable Location	<b>DAMP</b>
Ingress Protection Rating	IP40

### LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	<b>7</b>

### COMPONENTS

LED Light Source	Samsung 2835
Driver	Simon SI50-I1000

### CONSTRUCTION

Housing	24 Gauge Steel
Base / Power Supply	Hard Wired
Finish	White

### QUALIFICATIONS

Manufacturer Model #	55270
----------------------	-------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.


CF3334 XTREME DUTY • 7YR  
LED 2X2 RECESSED TROFFER



DIMENSIONS (Inches)

Length	23.8"
Width/Diameter	23.8"
Height	3.6"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

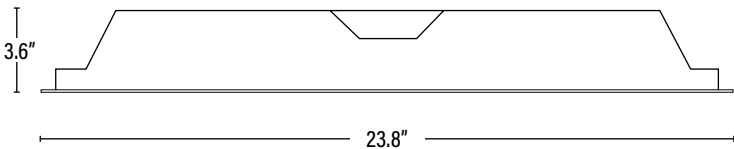

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	811768028225	26" x 25" x 4"	11.2
Country of Origin	China			
HS Tariff	9405.40.6000			

ORDERING

ITEM#	DESCRIPTION	CASE
CF3334	LED 2X2 TROFFER - 34W/40K/120-277V/DIMMABLE	1

Manufactured by P.Q.L., Inc. - Manufacturer Model # 55270

PERFORMANCE DATA

PACKAGING