



## CF3565 XTREME DUTY • 7YR LED 2x4 PANEL

2X4 LUMINARIES FOR AMBIENT LIGHTING OF  
INTERIOR COMMERCIAL SPACES

### FEATURES

- Energy efficient: save up to 80% in energy costs
- High lumen output
- Instant-On
- For covered ceilings only
- Earthquake proof hooks included

### APPLICATION

Ideal for retrofitting inefficient fixtures in malls, hospitals, airports, offices, lobbies and other residential and commercial applications.

### ELECTRICAL

|                                 |            |
|---------------------------------|------------|
| Wattage                         | 65W        |
| Voltage                         | 120-277V   |
| Current                         | 0.54-0.23A |
| Power Factor                    | 0.9        |
| Total Harmonic Distortion (THD) | 15         |

### LIGHTING PERFORMANCE

|                           |  |
|---------------------------|--|
| Lumens                    | 6760                                       |
| Lumens Per Watt (Lm/W)    | 104  |
| Color Temperature (CCT)   | 5000K                                      |
| Color Rendering (CRI)     | 80   |
| R9 (Red Value)            | 11   |
| R13 (Skin Tones)          | 84   |
| Beam Angle                | 120°                                       |
| Light Distribution        | Type VS                                    |
| Dimmable Lighting Control | <i>Dimmable</i><br>0-10V, Range 10% - 100% |

### ENVIRONMENT

|                           |             |
|---------------------------|-------------|
| Operating Temperature     | -4° ~ 122°F |
| Suitable Location         | <b>DAMP</b> |
| Ingress Protection Rating | IP40        |

### LIFESPAN

|                      |          |
|----------------------|----------|
| Average Life (Hours) | 50,000   |
| Warranty (Years)     | <b>7</b> |

### COMPONENTS

|                  |                 |
|------------------|-----------------|
| LED Light Source | Samsung 1228    |
| Driver           | XZ-PK60B-420145 |

### CONSTRUCTION

|                     |            |
|---------------------|------------|
| Housing             | Aluminum   |
| Lens                | PMMA       |
| Base / Power Supply | Hard Wired |
| Finish              | White      |

### QUALIFICATIONS

|                      |       |
|----------------------|-------|
| Manufacturer Model # | 55349 |
|----------------------|-------|



*Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.*



CF3565 XTREME DUTY • 7YR  
LED 2x4 PANEL



DIMENSIONS (Inches)

|                |       |
|----------------|-------|
| Length         | 47.8" |
| Width/Diameter | 23.7" |
| Height         | 1.7"  |
| Weight (Lbs)   | 13.5  |

Line drawings may not be to scale and are for general reference only.

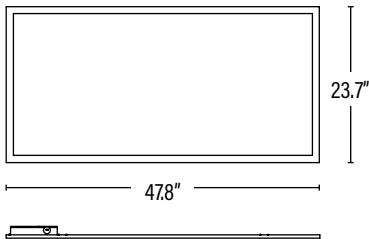

TOP VIEW

| PACKAGING         |              | UPC            | DIMENSIONS (LxWxH) | GROSS WEIGHT (Lbs) |
|-------------------|--------------|----------------|--------------------|--------------------|
| Master Carton     | 2            | 10811768025740 | --                 | --                 |
| Individual Box    | 1            | 811768025743   | --                 | --                 |
| Country of Origin | China        |                |                    |                    |
| HS Tariff         | 9405.40.6000 |                |                    |                    |

ORDERING

| ITEM#  | DESCRIPTION                                  | CASE |
|--------|--|------|
| CF3565 | LED 2X4 PANEL - 65W/50K/120-277V/DIMMABLE/V5 | 2    |

Manufactured by P.Q.L., Inc. - Manufacturer Model # 55349

PERFORMANCE DATA

PACKAGING