



**CF6085 XTREME DUTY • 7YR
LED STEALTH™ FIXTURE**
OUTDOOR POLE/ARM-MOUNTED AREA AND
ROADWAY LUMINAIRES • ARCHITECTURAL FLOOD
AND SPOT LUMINAIRES

FEATURES

- Engineered for high lumen per watt light output.
- Slim and modern appearance.
- Integrated heat sink, provides excellent thermal dissipation.
- Surge protection device.
- Easy 1 person installation with our quick mount bracket and hinged door frame; installer can be hands free when establishing electrical connections.

APPLICATION

Parking lot, street and building perimeter lighting. Can be used as flood or area light.

ELECTRICAL

Wattage	80W
Voltage	120-277V
Current	0.665A
Power Factor	0.9
Total Harmonic Distortion (THD)	12.3

LIGHTING PERFORMANCE

Lumens	11329
Lumens Per Watt (Lm/W)	142
Color Temperature (CCT)	5000K
Color Rendering (CRI)	83
R9 (Red Value)	N/A
R13 (Skin Tones)	N/A
Beam Angle	Type III M
Light Distribution	Type III, Short
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-40° ~ 131°F
Suitable Location	WET
Ingress Protection Rating	IP66

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	7

COMPONENTS

LED Light Source	Luxeon 3030 2D
Driver	Sosen SS-100E-58B

CONSTRUCTION

Housing	Aluminum
Lens	PC
Base / Power Supply	Hard Wired / Surge Protector
Finish	Bronze
Effective Projected Area (EPA)	0.23ft ²

QUALIFICATIONS

Manufacturer Model #	L-STL-80-5000K-MV-D-YY-ZZ-3
----------------------	-----------------------------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.


CF6085 XTREME DUTY • 7YR LED STEALTH™ FIXTURE



DIMENSIONS (Inches)

Length (MOL)	16.8"
Width/Diameter (MOD)	12"
Height	3.5"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

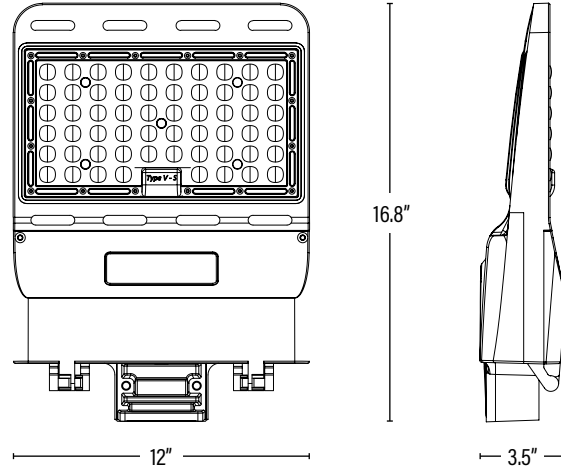

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	811768028225	18.5" x 13.8" x 13.8"	10
Country of Origin	China			
HS Tariff	9405.40.8200			

ORDERING

ITEM#	DESCRIPTION	CASE
CF6085	LED STEALTH™ 80W/50K/120-277V/DIMMABLE/BRONZE/V2	1

Manufactured by P.Q.L., Inc. - Manufacturer Model # L-STL-80-5000K-MV-D-YY-ZZ-3

ACCESSORIES/REPLACEMENT PARTS

LFV2UB	U-BRACKET TRUNNION QUICK ATTACH	10
LFV2RP	RIGID POLE QUICK ATTACH	10
LFV2TN	TENON SLIPFITTER QUICK ATTACH	10

ADDITIONAL INFORMATION:

*The mounting bracket is not included with the fixture, it is ordered as a separate item number. To qualify for rebates one of the Quick-Attach brackets must be purchased.

PERFORMANCE DATA

PACKAGING