

# MEBULBS



## CLX122 XTREME DUTY • 7YR LED 4' SPEC-SELECT™ SINGLE PANEL LINEAR HIGH BAY HIGH-BAY LUMINAIRES FOR COMMERCIAL AND INDUSTRIAL BUILDINGS

### FEATURES

Spec-Select™ Linear High Bays provide the versatility of six fixtures in one, delivering energy-efficient, customizable lighting for any space.

- Selectable Wattage & CCT: Field adjustable output.
- High Lumen Output: Bright and energy-efficient.
- Integrated LED: Maintenance-free.
- HID/Fluorescent Replacement: Easy upgrade.
- Wide Beam Angle: Uniform light distribution.
- Durable Construction: Painted steel with smooth edges and rounded corners.
- Sensor Ready: Multiple knockouts and 12VDC auxiliary power for easy sensor integration.
- Designed for suspended or pendant mounting, with V-hooks and 41.3" chains included.

### APPLICATION

Larger warehouses, retail applications, commercial buildings and work areas.

<sup>1</sup> Our fixtures come preset to 5000K.

## PRODUCT INFORMATION

| ELECTRICAL  |   |
|---|---|
| Wattage (Selectable)  | 155-185-200W  |
| Voltage   | 120-277V  |
| Surge Protection  | Built-In  |
| Power Factor  | 0.9   |
| THD   | 20  |
| OPTICAL   |   |
| Efficiency (LPW)  | Up to 150   |
| Lumens  | 23,250 / 27,750 / 30,000                                    |
| CCT (Selectable)  | 4000K / 5000K   |
| CRI   | 80  |
| Beam Angle  | 120°  |
| Dimming   | 0-10V   |
| ENVIRONMENT   |   |
| Operating Temperature   | -40° ~ 122°F  |
| Suitable Location   | Damp  |
| CONSTRUCTION  |   |
| Housing   | Sheet Metal   |
| Lens  | PC  |
| Base / Power Supply   | Hard Wired  |
| Finish  | White   |
| LIFESPAN <small>(Complete terms can be found on our website.)</small> |   |
| Life Hours  | 50,000  |
| Warranty (Years)  | 7   |
| LISTINGS  |   |
| Model Number  | HLM14P2002CUW   |
| Primary Use Designation   | High-Bay Luminaires for Commercial and Industrial Buildings |




Manufactured by P.Q.L., Inc. • Model Number: HLM14P2002CUW

# CLX122 XTREME DUTY • 7YR LED 4' SPEC-SELECT™ SINGLE PANEL LINEAR HIGH BAY



## DIMENSIONS

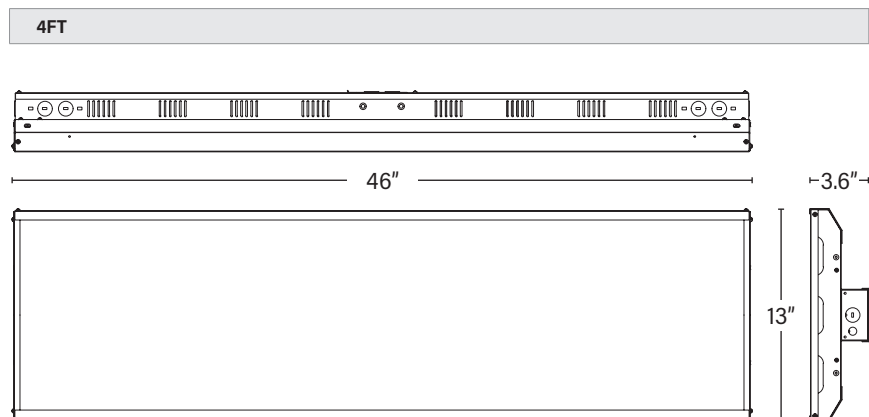

## PACKAGING

| MASTER CASE        | HLM14P2002CUW      |
|--------------------|--------------------|
| Quantity           | 1                  |
| Size (LxWxH)       | 46.9" x 13.6" x 4" |
| Gross Weight (Lbs) | --                 |

Tariff: 9405.11.6020 • COO: Vietnam

## PERFORMANCE DATA

| WATTAGE | LUMENS | LPW | CRI | CURRENT |       | POWER FACTOR | THD | DRIVER | DLC MODEL NUMBER | LISTINGS |
|---------|--------|-----|-----|---------|-------|--------------|-----|--------|------------------|----------|
|         |        |     |     | 120V    | 277V  |              |     |        |                  |          |
| 155W    | 23,250 | 150 | 80  | 1.29A   | 0.56A | 0.9          | 20  | --     | HLM14P2002CUW    | cUL      |
| 185W    | 27,750 |     |     | 1.54A   | 0.66A |              |     |        |                  |          |
| 200W    | 30,000 |     |     | 1.66A   | 0.72A |              |     |        |                  |          |

## ACCESSORIES *(Field Installation)*

| CODE   | DESCRIPTION   |
|--------|---|
| LF3625 | 3.3IN PENDENT MOUNT FOR 4' LINEAR HIGH BAY  |
| LF3399 | LOW/HIGH BAY FIXTURE OCCUPANCY PIR SENSOR 30FT DIA, 8-40FT HEIGHT 800W/1200W • 120/277V             |
| LF3598 | HIGH BAY BI-LEVEL & DAYLIGHT HARVEST MICROWAVE SENSOR 60FT DIA, 8-50FT HEIGHT 800W/1200W • 120/277V |