

# MEBULBS



## HLX140 COMMERCIAL DUTY • 5YR LED 4' SPEC-SELECT™ SINGLE PANEL LINEAR HIGH BAY HIGH-BAY LUMINAIRES FOR COMMERCIAL AND INDUSTRIAL BUILDINGS

### FEATURES

Spec-Select™ Linear High Bays provide the versatility of six fixtures in one, delivering energy-efficient, customizable lighting for any space.

- Selectable Wattage & CCT: Field adjustable output.
- High Lumen Output: Bright and energy-efficient.
- Integrated LED: Maintenance-free.
- HID/Fluorescent Replacement: Easy upgrade.
- Wide Beam Angle: Uniform light distribution.
- Durable Construction: Painted steel with smooth edges and rounded corners.
- Sensor Ready: Multiple knockouts and 12VDC auxiliary power for easy sensor integration.
- Designed for suspended or pendant mounting, with V-hooks and 41.3" chains included.

### APPLICATION

Larger warehouses, retail applications, commercial buildings and work areas.

<sup>1</sup> Our fixtures come preset to 5000K.

### PRODUCT INFORMATION

ELECTRICAL	
Wattage (Selectable)	270-340-400W
Voltage	120-277V
Surge Protection	Built-In
Power Factor	0.9
THD	20
OPTICAL	
Efficiency (LPW)	Up to 150
Lumens	40,500 / 51,000 / 60,000
CCT (Selectable)	4000K / 5000K
CRI	80
Beam Angle	120°
Dimming	0-10V
ENVIRONMENT	
Operating Temperature	-40° ~ 122°F
Suitable Location	Damp
CONSTRUCTION	
Housing	Sheet Metal
Lens	PC
Base / Power Supply	Hard Wired
Finish	White
LIFESPAN <i>(Complete terms can be found on our website.)</i>	
Life Hours	50,000
Warranty (Years)	5
LISTINGS	
Model Number	HLM14P4002CUW
Primary Use Designation	High-Bay Luminaires for Commercial and Industrial Buildings




Manufactured by P.Q.L., Inc. • Model Number: HLM14P4002CUW

# HLX140 COMMERCIAL DUTY • 5YR LED 4' SPEC-SELECT™ SINGLE PANEL LINEAR HIGH BAY



## DIMENSIONS

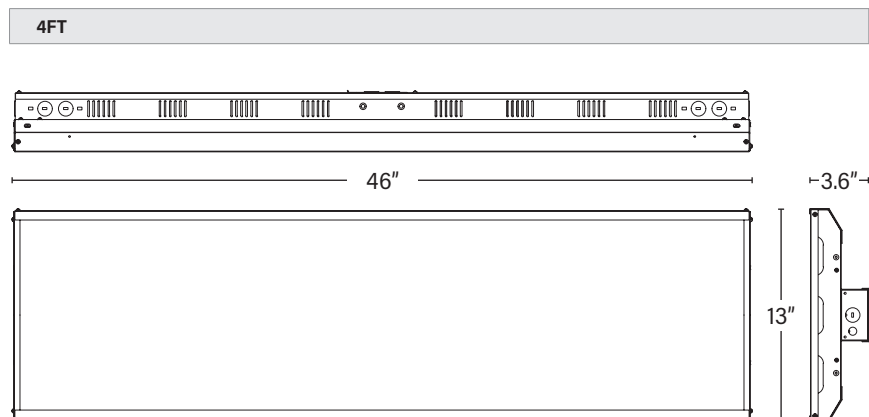

## PACKAGING

MASTER CASE	HLM14P4002CUW
Quantity	1
Size (LxWxH)	46.9" x 13.6" x 4"
Gross Weight (Lbs)	--

Tariff: 9405.11.6020 • COO: Vietnam

## PERFORMANCE DATA

WATTAGE	LUMENS	LPW	CRI	CURRENT		POWER FACTOR	THD	DRIVER	DLC MODEL NUMBER	LISTINGS
				120V	277V					
270W	40,500	150	80	2.25A	0.97A	0.9	20	--	HLM14P4002CUW	cUL
340W	51,000			2.83A	1.22A					
400W	60,000			3.33A	1.44A					

## ACCESSORIES *(Field Installation)*

CODE	DESCRIPTION
LF3625	3.3IN PENDENT MOUNT FOR 4' LINEAR HIGH BAY
LF3399	LOW/HIGH BAY FIXTURE OCCUPANCY PIR SENSOR 30FT DIA, 8-40FT HEIGHT 800W/1200W • 120/277V
LF3598	HIGH BAY BI-LEVEL & DAYLIGHT HARVEST MICROWAVE SENSOR 60FT DIA, 8-50FT HEIGHT 800W/1200W • 120/277V