



PREMIUM QUALITY LIGHTING®

C16114 - XTREME DUTY 8yr

L16114 - Lt. Commercial 5yr

LED CEILING LIGHT

TECHNICAL DATA SHEET

FEATURES



LED ceiling light provides glare free illumination and even light distribution with a clean, modern look. Designed with the lasted solid state lighting and electronic driver for optimal performance and energy efficiency.

- Die formed cold rolled steel; painted with a treatment for anti-corrosion.
- Diffusing lens
- TRIAC dimming 0-10v
- IP20


APPLICATION

Offices, hallways, malls, hospitals, airports, lobbies and other residential and commercial applications.

SPECIFICATIONS	
Power Consumption	16W
Input Voltage	120V
Power Factor	0.8
Lumens	1000
Luminous Efficiency	63 Lm/W
Color Temperature	4000K
CRI	80
Beam Angle	120°
Finish	White
Dimensions (Inches)	11"(DIA) x 3.6"(H)
LIFESPAN & ENVIRONMENT	
Average Life	25,000
Operating Temperature	-20°C ~ 40°C



DIMENSIONS

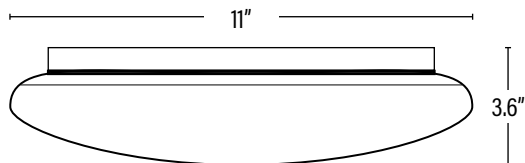

DIMMER COMPATIBILITY

LUTRON	LEVITON
LGCL-153PLH-WH	6674
SCL-153PR- WH	IPL06
	6631

ORDERING

ITEM#	DESCRIPTION	WATTS	COLOR	LUMENS	CRI	VOLTS	HOURS	CASE
C/L16114	LED 16W 11" WHITE MUSHROOM CEILING LIGHT/40K/120V/DIMMABLE 83754	16	4000K	1000	80	120	35,000	10