



## LD4325 LT. COMMERCIAL • 5YR LED 48" DESIGNER STRIP

DIRECT LINEAR AMBIENT LUMINARIES

### FEATURES

- Diffusing lens for bright, uniform light.
- Low-profile with a limitless range of applications.
- Use 30% less energy than a linear fluorescent fixture.
- All steel surfaces are painted after fabrication for smooth edges and rounded corners.

### MOUNTING

- Designed for surface or suspended chain mounting; individually or in a continuous row.

### APPLICATION

Ideal for larger warehouses, retail applications, commercial buildings and work areas.

### ELECTRICAL

Wattage	32W
Voltage	120-277V
Current	0.261A
Power Factor	0.9
Total Harmonic Distortion (THD)	10

### LIGHTING PERFORMANCE

Lumens	4256
Lumens Per Watt (Lm/W)	133
Color Temperature (CCT)	5000K
Color Rendering (CRI)	80
R9 (Red Value)	17
R13 (Skin Tones)	85
Beam Angle	130°
Light Distribution	Type II, Very Short
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

### ENVIRONMENT

Operating Temperature	-4° ~ 122°F
Suitable Location	<b>DAMP</b>
Ingress Protection Rating	IP40

### LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	<b>5</b>

### COMPONENTS

LED Light Source	Seoul STWxA2PD-xx
Driver	ESPEN VEL30065MVHDA

### CONSTRUCTION

Housing	24 Gauge Steel
Base / Power Supply	Hard Wired
Finish	White

### QUALIFICATIONS

Manufacturer Model #	55248
----------------------	-------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.


LD4325 LT. COMMERCIAL • 5YR  
LED 48" DESIGNER STRIP



DIMENSIONS (Inches)

Length	48"
Width/Diameter	3.4"
Height	3.6"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

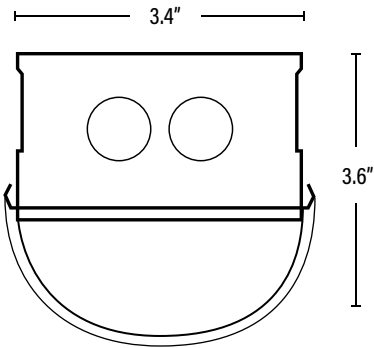

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	6	10811768025764	--	--
Individual Box	1	811768025767	--	--
Country of Origin	China			
HS Tariff	9405.40.8200			

ORDERING

ITEM#	DESCRIPTION	CASE
LD4325	48" DESIGNER 32W 5000K 120-277V DIMMABLE	6

Manufactured by P.Q.L., Inc. - Manufacturer Model # 55248

PERFORMANCE DATA

PACKAGING