



LF0544 LT. COMMERCIAL • 5YR LED CANOPY

PARKING GARAGE LUMINAIRES

FEATURES

- Ultra-thin design
- Replaces 100-175W MH

HOUSING

- Sealed die-casting profile for indoor applications
- · Polycarbonate optical lens with heat resisting

MOUNTING

• Three 1/2" threaded conduit and one 3/4" conduit entry points

APPLICATION

Parking structures and storage areas

EL	EC	TR	IC	AL
ΕL	EÜ	ΙK	IC	AL

ELECTRICAL		
Wattage	45W	
Voltage	100-277V	
Current	0.369A	
Power Factor	0.9	
Total Harmonic Distortion (THD)	13.8	
LIGHTING PERFORMANCE		
Lumens	4005	
Lumens Per Watt (Lm/W)	92	
Color Temperature (CCT)	4000K	
Color Rendering (CRI)	84	
R9 (Red Value)		
R13 (Skin Tones)		
Beam Angle	160°	
Light Distribution	Type VS	
Dimmable Lighting Control	OUT CHANNELLY	
ENVIRONMENT		
Operating Temperature	-40° ~ 104°F	
Suitable Location	WET	
Ingress Protection Rating	IP65	
LIFESPAN		
Average Life (Hours)	50,000	
Warranty (Years)	5	

COMPONENTS

LED Light Source	Cree CXA3050
Driver	52111 (50W Max.)

CONSTRUCTION

Housing	Aluminum/PC
Base / Power Supply	Hard Wired
Finish	Black
OHALIFICATIONS	

QUALIFICATIONS

Manufacturer Model # 83230	
----------------------------	--



Manufactured by P.Q.L., Inc. - Published lumens on LED products are approximate and may vary slightly.


LF0544 LT. COMMERCIAL • 5YR LED CANOPY



DIMENSIONS (Inches)

,	
Length	9.6"
Width/Diameter	9.6"
Height	3.1"
Weight (Lbs)	4.7

Line drawings may not be to scale and are for general reference only.

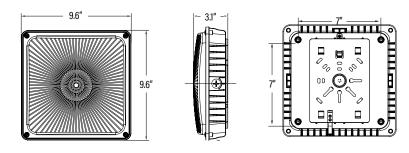

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	811768025910	11.8" x 11.8" x 5.5"	6.2
Country of Origin	China			
HS Tariff	9405.40.6000			

ORDERING

ITEM#	DESCRIPTION	CASE
LF0544	LED CANOPY 45W/40K/100-277V/BLACK	1

Manufactured by P.Q.L., Inc. - Manufacturer Model # 83230