

40W



LF0545 LT. COMMERCIAL • 5YR **LED CANOPY**

PARKING GARAGE LUMINAIRES

FEATURES

- Ultra-thin design
- Replaces 100-175W MH

HOUSING

- · One piece sealed die cast housing
- Heat resistant polycarbonate optical lens

MOUNTING

- Surface Mount with J-Box
- Pendent with 3/4" conduit

APPLICATION

Parking structures and storage areas

ELECTRICAL	
Wattage	

120-277V Voltage Current 0.34A **Power Factor** 0.9 Total Harmonic Distortion (THD) 15

LIGHTING PERFORMANCE

LIUTI INU PENFUNNANCE	
Lumens	5450
Lumens Per Watt (Lm/W)	136
Color Temperature (CCT)	5000K
Color Rendering (CRI)	70
R9 (Red Value)	-21
R13 (Skin Tones)	71
Beam Angle	160°
Light Distribution	Type VS
Dimmable Lighting Control	

ENVIRONMENT

Operating Temperature	-40° ~ 104°F
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Luxeon 3030 2D
Driver	LED-DR-50-W-XXX

CONSTRUCTION

Housing	Aluminum
Lens	PC
Base / Power Supply	Hard Wired
Finish	Black

QUALIFICATIONS

Manufacturer Model # 83344



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.


LF0545 LT. COMMERCIAL • 5YR LED CANOPY



DIMENSIONS (Inches)

Length	9.5"
Width/Diameter	9.5"
Height	3.2"
Weight (Lbs)	4.2

Line drawings may not be to scale and are for general reference only.

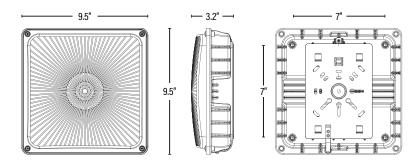

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	6	10811768025924		
Individual Box	1	811768025927		
Country of Origin	China			
HS Tariff	9405.40.6000			

ORDERING

ITEM#	DESCRIPTION	CASE
LF0545	LED CANOPY 40W/50K/120-277V/BLACK/V3	6

Manufactured by P.Q.L., Inc. - Manufacturer Model # 83344