



## LF0564 LT. COMMERCIAL • 5YR LED CANOPY PARKING GARAGE LUMINAIRES

### FEATURES

- Ultra-thin design
- Replaces 400W MH

### HOUSING

- One piece sealed die-cast housing provides better waterproofing for indoor and outdoor applications.
- Polycarbonate optical lens offers impact and heat resistance.

### MOUNTING

- Suitable for J-Box or pendent mounting.


### APPLICATION

Parking structures and storage areas

### ELECTRICAL

Wattage	60W
Voltage	120-277V
Current	0.5A
Power Factor	0.9
Total Harmonic Distortion (THD)	15

### LIGHTING PERFORMANCE

Lumens	7800
Lumens Per Watt (Lm/W)	130
Color Temperature (CCT)	4000K
Color Rendering (CRI)	70
R9 (Red Value)	-24
R13 (Skin Tones)	71
Beam Angle	160°
Light Distribution	Type VS
Dimmable Lighting Control	

### ENVIRONMENT

Operating Temperature	-40° ~ 104°F
Suitable Location	<b>WET</b>
Ingress Protection Rating	IP65

### LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	<b>5</b>

### COMPONENTS

LED Light Source	LUXEON 3030 2D
Driver	LED-DR-70-W-XXX

### CONSTRUCTION

Housing	Aluminum/PC
Base / Power Supply	Hard Wired
Finish	Black

### QUALIFICATIONS

Model Number	L-CNPY-60-MV-40K-B
--------------	--------------------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.


# LF0564 LT. COMMERCIAL • 5YR LED CANOPY



## DIMENSIONS (Inches)

Length	9.5"
Width/Diameter	9.5"
Height	3.2"
Weight (Lbs)	5.1

Line drawings may not be to scale and are for general reference only.

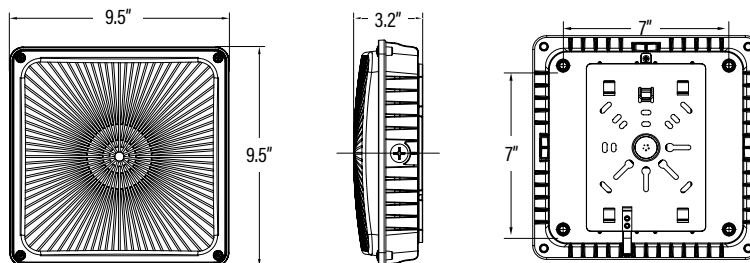

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	6	10899645001032	10.6" x 10.6" x 3.9"	--
Inner Carton	1	899645001035	--	--
Country of Origin	China			
HS Tariff	9405.40.6000			

## ORDERING

ITEM#	DESCRIPTION	CASE
LF0564	LED CANOPY 60W/40K/120-277V/BLACK/V3	6

Manufactured by P.Q.L., Inc. - Manufacturer Model # L-CNPY-60-MV-40K-B

## ADDITIONAL INFORMATION:

**Note:** To prevent water damage which may shorten the life of an exterior mounted fixture; the fixture should be properly weather sealed according to the installation instructions or between the fixture base and mounting surface. Damage due to improper installation may void the warranty.

PERFORMANCE DATA

PACKAGING