



LF0565 LT. COMMERCIAL • 5YR
LED CANOPY
PARKING GARAGE LUMINAIRES

FEATURES

- Ultra-thin design
- Replaces 400W MH

HOUSING

- One piece sealed die-cast housing provides better waterproofing for indoor and outdoor applications.
- Polycarbonate optical lens offers impact and heat resistance.

MOUNTING

- Suitable for J-Box or pendent mounting.


APPLICATION

Parking structures and storage areas

ELECTRICAL

Wattage	60W
Voltage	120-277V
Current	0.5A
Power Factor	0.9
Total Harmonic Distortion (THD)	15

LIGHTING PERFORMANCE

Lumens	8000
Lumens Per Watt (Lm/W)	133
Color Temperature (CCT)	5000K
Color Rendering (CRI)	70
R9 (Red Value)	-19
R13 (Skin Tones)	73
Beam Angle	160°
Light Distribution	Type VS
Dimmable Lighting Control	

ENVIRONMENT

Operating Temperature	-40° ~ 104°F
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	LUXEON 3030 2D
Driver	LED-DR-70-W-XXX

CONSTRUCTION

Housing	Aluminum/PC
Base / Power Supply	Hard Wired
Finish	Black

QUALIFICATIONS

Model Number	L-CNPY-60-MV-50K-B
--------------	--------------------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.

PERFORMANCE DATA

PACKAGING


LF0565 LT. COMMERCIAL • 5YR LED CANOPY



DIMENSIONS (Inches)

Length	9.5"
Width/Diameter	9.5"
Height	3.2"
Weight (Lbs)	5.1

Line drawings may not be to scale and are for general reference only.

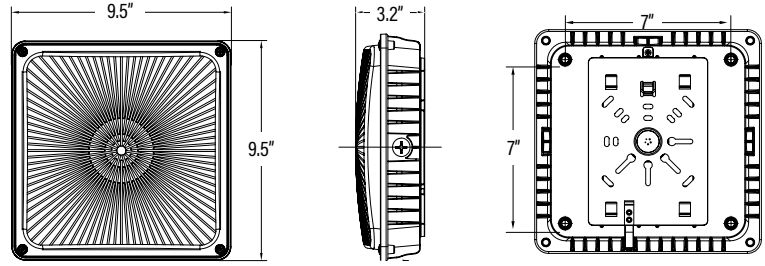

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	6	10854432004269	10.6" x 10.6" x 3.9"	--
Inner Carton	1	854432004262	--	--
Country of Origin	China			
HS Tariff	9405.40.6000			

ORDERING

ITEM#	DESCRIPTION	CASE
LF0565	LED CANOPY 60W/50K/120-277V/BLACK/V3	6

Manufactured by P.Q.L., Inc. - Manufacturer Model # L-CNPY-60-MV-50K-B

ADDITIONAL INFORMATION:

Note: To prevent water damage which may shorten the life of an exterior mounted fixture; the fixture should be properly weather sealed according to the installation instructions or between the fixture base and mounting surface. Damage due to improper installation may void the warranty.

PERFORMANCE DATA

PACKAGING