



LF3500 LT. COMMERCIAL • 5YR EMERGENCY PACK

LED EMERGENCY PACK FOR PRODUCTS WITH AN
EXTERNAL DRIVER

The LED Emergency Pack allows the same LED fixture to be used for both normal and emergency operations. In the event of a power failure, the LED Emergency Pack switches to the emergency mode and operates the existing fixture for 90 minutes. The unit contains a battery, charger and converter circuit.

FEATURES

- Dial code with 4 power options
- Constant output power
- Rechargeable Ni-Cd long life high temperature battery
- Includes test switch and charge indicator accessory kit

ELECTRICAL

Output Power (MAX.)	15W
Output Voltage	12V-48Vdc
Output Current (MAX.)	1250mA
Input Power (MAX.)	7.5W
Input Voltage	100-277V 50/60Hz
Input Current (MAX.)	90mA

LIFESPAN

Warranty (Years)	5
Battery Recharge	24 Hours
Battery Life	7-10 Years
UL Conditions	Must be factory wired battery Temperature must not exceed 50°C

CONSTRUCTION

Housing	High Temperature Nickel Cadmium
Base / Power Supply	Hard Wired

QUALIFICATIONS

Manufacturer Model #	55280
----------------------	-------



Manufactured by P.Q.L., Inc.


LF3500 LT. COMMERCIAL • 5YR EMERGENCY PACK



DIMENSIONS (Inches)

Length	14.5"
Width/Diameter	2.2"
Height	--
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

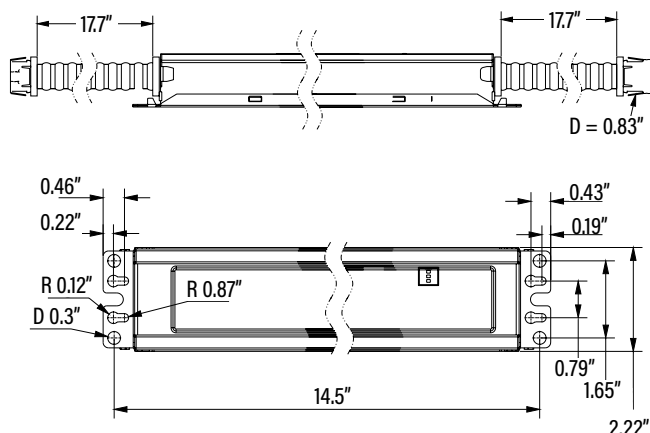

PACKAGING	UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	10	10811768023531	--
Individual Box	1	811768023534	--
Country of Origin	China		
HS Tariff	9405.99.4090		

ORDERING

ITEM#	DESCRIPTION	CASE
LF3500	EMERGENCY PACK FOR LED FIXTURE 15W/90 MIN/V5	10

Manufactured by P.Q.L., Inc. - Manufacturer Model # 55280

ADDITIONAL INFORMATION:

DIAL CODE SELECTION					
CODE SWITCH			VOLTAGE	POWER	EMERGENCY
1	2	3			
--	--	--	12-48V	15W	90 Min.
--	--	ON		12W	100 Min.
--	ON	--		7W	160 Min.
ON	--	--		4W	330 Min.