

FEATURES



OUTDOOR POLE/ARM-MOUNTED AREA AND ROADWAY LUMINAIRES ARCHITECTURAL FLOOD AND SPOT LUMINAIRES

- Elegant and modern appearance
- Die cast aluminum housing
- Lifespan of 50,000 hours or more
- Type III Light Distribution
- IP Grade: IP65

APPLICATION



Parking lot, street and building perimeter lighting.

SPECIFICATIONS

Power Consumption	300W
Input Voltage	100-277V
Power Factor	0.9
Lumens	33600
Luminous Efficiency	112 Lm/W
Color Temperature	5000K
CRI	80
Beam Angle	130°
Finish	Bronze
Dimensions (Inches)	25.3"(L) x 15.7"(W) x 3.4"(H)
Weight	11.5kg / 25.3 lbs
LED	
LED Driver	Inventronics EUC-320S490(ST)(3)
LED Type	Philips
LIFESPAN & ENVIRONMENT	
Average Life	50,000
Operating Temperature	-30°C ~ 45°C



DIMENSIONS

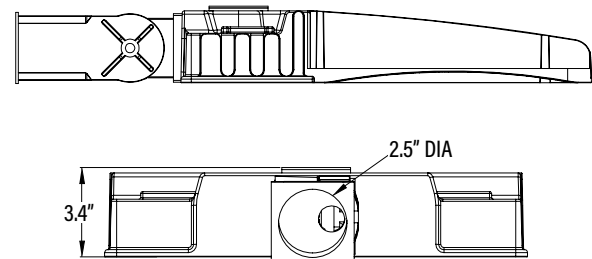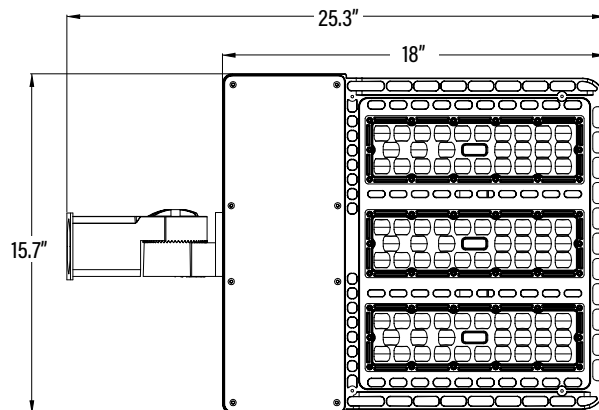

ORDERING

ITEM#	DESCRIPTION	WATTS	COLOR	LUMENS	CRI	VOLT	HOUSING	HOURS	CASE
CF/LF5350	LED STEALTH™ SHOE BOX 300W/50K/100-277V-SLIP FITTER/BRONZE 83604	300	5000K	33600	80	100-277V	BRONZE	50,000	1