

### FEATURES



#### OUTDOOR POLE/ARM-MOUNTED AREA AND ROADWAY LUMINAIRES ARCHITECTURAL FLOOD AND SPOT LUMINAIRES

- Elegant and modern appearance
- Die cast aluminum housing
- Dimming and Occupancy Sensor (Merrytek MC601V)
- IP65

#### APPLICATION



Parking lot, street and building perimeter lighting.



### SPECIFICATIONS

Power Consumption	300W
Input Voltage	100-277V
Power Factor	0.9
THD	15.1
Lumens	33600
Luminous Efficiency	112 Lm/W
Color Temperature	5000K
CRI	80
Beam Angle	130°
Light Distribution	Type III
Finish	Bronze
Dimensions (Inches)	25.3"(L) x 15.7"(W) x 3.4"(H)
Weight	4.5kg / 9.9 lbs
<b>LED</b>	
LED Driver	Sosen SS-200H-42
LED Type	Philips
<b>LIFESPAN &amp; ENVIRONMENT</b>	
Average Life	50,000
Operating Temperature	-30°C ~ 45°C

### DIMENSIONS

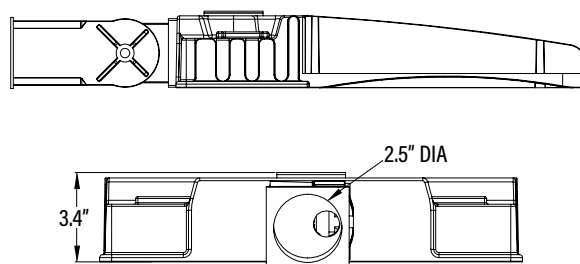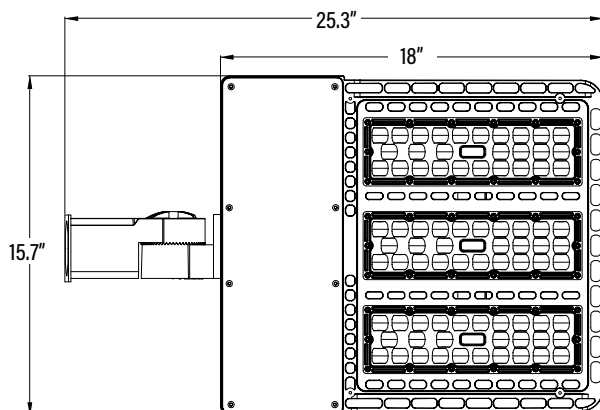

### ORDERING

ITEM#	DESCRIPTION	WATTS	COLOR	LUMENS	CRI	VOLT	HOUSING	HOURS	CASE
CF/LF535M	LED STEALTH™ 300W/50K/100-277V - SLIP FITTER/BRZ/DIMM & OCC SENSOR 83634	300	5000K	33600	80	100-277V	BRONZE	50,000	1