



LFC002 LT. COMMERCIAL • 5YR
BI-LEVEL MICROWAVE SENSOR
LED STEALTH™ CUTOFF WALL PACK ACCESSORY



FEATURES

- Slim, low-profile design.
- 12-24dVC power supply.

APPLICATION

Sensor is designed for use with LED Stealth™ Cutoff Wall Packs.

SENSOR COVERAGE

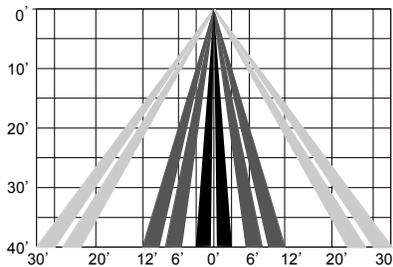

ELECTRICAL

Operating Voltage	12-24vDC
Max. Current Sink	50mA ± 5%
HF System	5.8Ghz ± 75MHz
Transmission Power	<0.2mW

PERFORMANCE

Detection Radius	3.3' - 26.2'
Max Mounting Height	40' Max.
Time Settings	10s - 60 Mins.
Light Control	24H / 10 - 50 Lux
Dimmable Lighting Control	0-10V

ENVIRONMENT

Operating Temperature	-4° ~ 140°F
Suitable Location	WET
Ingress Protection Rating	IP65

CONSTRUCTION

Housing	PC
Finish	White

Specifications are subject to change without notice.


LFC002 LT. COMMERCIAL • 5YR BI-LEVEL MICROWAVE SENSOR



ITEM INFORMATION

DIMENSIONS (Inches)

Length (MOL)	1.6"
Width/Diameter (MOD)	2.2"
Height	1.7"
Weight (Lbs)	0.07

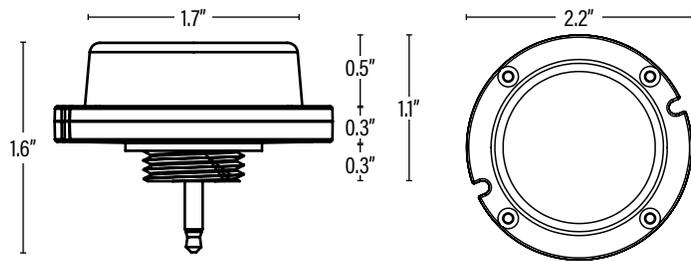

PACKAGING	UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)	
Master Carton	200	10811768027065	20.7" x 10.6" x 7.3"	19.8
Individual Box	1	811768027068	--	0.09
Country of Origin	China			
HS Tariff	--			


ORDERING

ITEM#	DESCRIPTION	CASE
LFC002	MICROWAVE MOTION SENSOR FOR LED STEALTH™ FULL CUTOFF WALL PACK/12-24vDC	200

ADDITIONAL INFORMATION:

Factory Default Settings: Sensitivity set to 100%. Hold on time 5 min. Daylight sensor set as disabled. Dimming level at 30%. Dimming time at 60 minutes.
**RC-100 remote (sold separately) required to make adjustments to any sensor settings. The LED light will turn on/off as confirmation of change.*

WIRING DIAGRAM (Pre-wired in fixture)

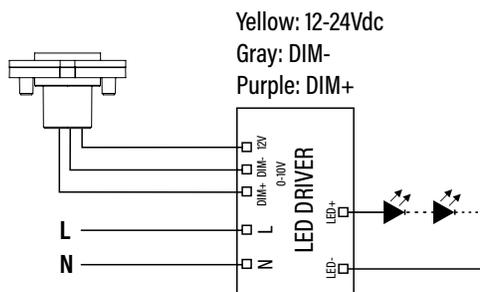

Cable Specifications:
 AWM 2464 22AWG 80°C 300V
 Length: 11.8"

CONNECTING BASE (Pre-installed in fixture)

