



**SELECTABLE
WATTAGE**

**LFX605 COMMERCIAL DUTY • 5YR
LED WALL PACK**
OUTDOOR NON-CUTOFF AND SEMI-CUTOFF
WALL-MOUNTED AREA LUMINARIES

FEATURES

- Selectable wattage, 1 of 4 options
- Durable, die cast housing.
- Powder coat finish, corrosion and weather resistant.
- Sealed to keep out moisture and environmental contaminants.

APPLICATION

Ideal for security, walkways and perimeter lighting.

ELECTRICAL

Wattage	20W / 25W / 40W / 60W
Voltage	120-277V
Current	1100mA
Power Factor	0.9
Total Harmonic Distortion (THD)	20

LIGHTING PERFORMANCE

Lumens	2700-8100
Lumens Per Watt (LPW)	135
Color Temperature (CCT)	5000K
Color Rendering (CRI)	70
R9 (Red Value)	-29
Beam Angle	114°
Light Distribution	Type I, Short
BUG Rating (Backlight, Uplight, and Glare)	B3 - U4 - G3
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-40° ~ 104°F
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	LUXEON 3030 2D
Driver	MSPi-NIS70W21S

CONSTRUCTION

Housing	Aluminum
Lens	Glass
Base / Power Supply	Hard Wired
Finish	Bronze

QUALIFICATIONS

Model Number	83337
--------------	-------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.


LFX605 COMMERCIAL DUTY • 5YR LED WALL PACK



ITEM INFORMATION

DIMENSIONS (Inches)

Length	14.4"
Width	7.7"
Height	9.2"
Net Weight (Lbs)	--

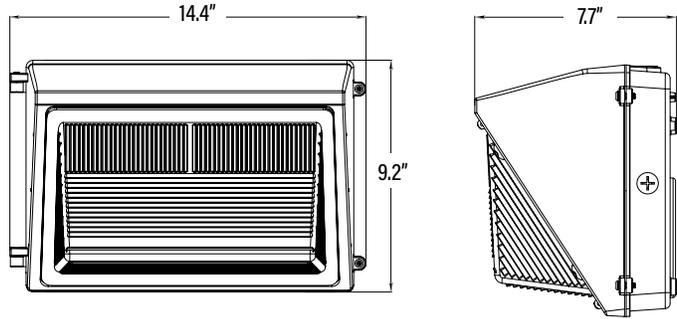

PACKAGING	UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)	
Master Carton	1	811768025125	15.4" x 10.6" x 9.4"	--
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
LFX605	LED WALL PACK/20-25-40-60W/50K/120-277V/BRZ	1

Manufactured by P.Q.L., Inc. - Manufacturer Model # 83337

ADDITIONAL INFORMATION:

Note: To prevent water damage which may shorten the life of an exterior mounted fixture; the fixture should be properly weather sealed according to the installation instructions or between the fixture base and mounting surface. Damage due to improper installation may void the warranty.