

## COMMERCIAL DUTY

# LGSX15

- Selectable wattage: Three adjustable output settings for on-site flexibility.
- Selectable CCT: Choose from three color temperatures.
- Built-in surge protection

## APPLICATION

A reliable HID alternative, ideal for commercial and industrial spaces like parking structures, gas stations, garages, underpasses, walkways, storage areas, and security lighting.



## PRODUCT INFORMATION

### ELECTRICAL

Wattages (Selectable)	100W / 120W / 150W
Voltage	120-277V
Current	150W @ 120V = 1.25A
Surge Protection	Built-In
Power Factor	0.9
THD	5.5

### PERFORMANCE

Lumens	14600 / 17520 / 22097
Efficiency (LPW)	146
CCT (Selectable)	4000K / 5000K / 5700K
CRI	83
Beam Angle	120°
Light Distribution	Type VS
B.U.G. Rating	B4 - U2 - G3
Dimming	0-10V

### ENVIRONMENT

Operating Temperature	-22° ~ 113°F
Suitable Location	Wet
IP Rating	IP65

### CONSTRUCTION

LED Chip	Lumiled
Driver	SS160NH-E260BH
Housing	Aluminum
Lens	PC
Base / Power Supply	Hard Wired
Finish	White

### LIFESPAN (Complete terms can be found on our website.)


Life Hours	50,000
Warranty (Years)	5

### LISTINGS

Model Number	CPY-WS-CS-CCT
--------------	---------------



## DIMENSIONS

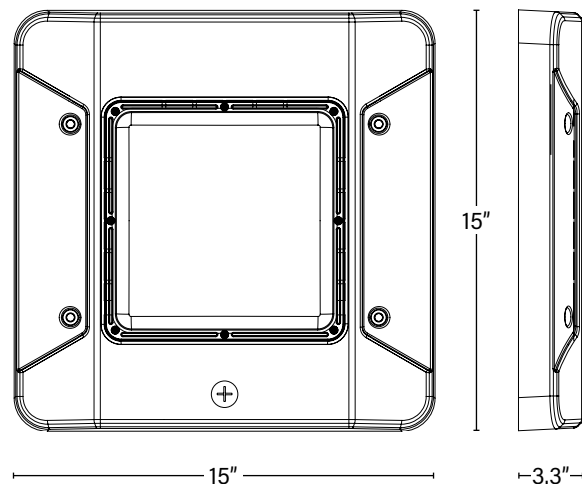

## ORDERING

CODE	DESCRIPTION	CASE
LGSX15	LED CANOPY/100-120-150W/40-50-57K/DIMM/120-277V/WHT	1

## PACKAGING

MASTER CASE	
Quantity	1
Size (LxWxH)	17.9" x 17.9" x 5.1"
Gross Weight (Lbs)	12.1
UPC	811768024982

Tariff: 9405.11.6020

## NOTES

- Default settings: 100W, 4000K.
- To prevent water damage which may shorten the life of an exterior mounted fixture; the fixture should be properly weather sealed according to the installation instructions or between the fixture base and mounting surface. Damage due to improper installation may void the warranty.

Manufactured by PQL, Inc. • Model Number: CPY-WS-CS-CCT