



LMDX42 COMMERCIAL DUTY • 5YR LED SPEC-SELECT™ SNAP & GO™ MAGNETIC MODULES

LINEAR RETROFIT KITS FOR 2X4 LUMINAIRE

FEATURES

- Adjustable Wattage (3 settings)
- Adjustable Color (3 settings)
- Quick connect
- Magnetic mounting
- Innovative design

APPLICATION

Ideal for retrofitting for traditional fluorescent fixtures and recessed troffers in drop-in ceilings.



ELECTRICAL

Wattage	20W / 30W / 40W
Voltage	120-277V
Current	400mA
Power Factor	0.9
Total Harmonic Distortion (THD)	14

LIGHTING PERFORMANCE

Lumens	3000 / 4500 / 6000
Lumens Per Watt (LPW)	150
Color Temperature (CCT)	3500K / 4000K / 5000K
Color Rendering (CRI)	83
R9 (Red Value)	5
Beam Angle	118°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B2 - U1 - G1
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-40° ~ 113°F
Suitable Location	DAMP
Ingress Protection Rating	IP20
Fixture Type	Enclosed

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	2835
Driver	937836

CONSTRUCTION

Housing	Plastic
Base / Power Supply	Hard Wired

QUALIFICATIONS

Model Number	93782
--------------	-------




Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.

LMDX42 COMMERCIAL DUTY • 5YR LED SPEC-SELECT™ SNAP & GO™ MAGNETIC MODULES



ITEM INFORMATION

DIMENSIONS (Inches)	MODULES	DRIVER
Length	43.4"	14"
Width	0.7"	1.2"
Height	--	0.8"
Net Weight (Lbs)	1.5	

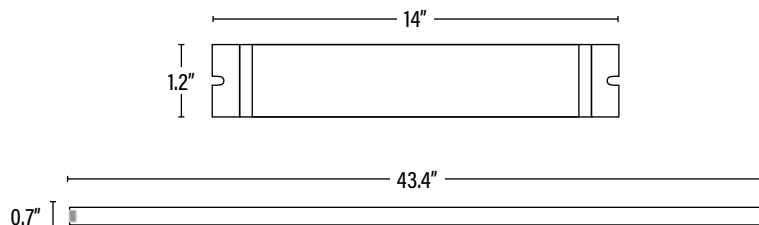

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	10	10811768021278	--	32.3
Individual Item	1	811768021271	N/A	N/A
Country of Origin	China			
HS Tariff	9405.11.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
LMDX42	LED SPEC-SELECT™ SNAP & GO™ MAGNETIC MODULES/20-30-40W/35-40-50K/DIMM/120-277V • 2X4FT	10

Manufactured by P.Q.L., Inc. - Manufacturer Model # 93782

ACCESSORIES

LMDX04	SINGLE FROSTED LENS FOR SPEC-SELECT™ SNAP & GO™ • 4FT OR 8FT	100
--------	--	-----