



SELECTABLE WATTAGE & CCT

LMDX44 COMMERCIAL DUTY • 5YR LED SPEC-SELECT[™] SNAP & GO[™] **MAGNETIC MODULES**

LINEAR RETROFIT KITS FOR 2X4 OR 2X8 LUMINAIRES

FEATURES

- Adjustable Wattage (3 settings)
- Adjustable Color (3 settings)
- Quick connect
- Magnetic mounting
- Innovative design

APPLICATION

Ideal for retrofitting for traditional fluorescent fixtures and recessed troffers in drop-in ceilings.

ELECTRICAL			
Wattage	30W / 38W /46W		
Voltage	120-277V		
Current	460mA		
Power Factor	0.9		
Total Harmonic Distortion (THD)	12.9		
LIGHTING PERFORMANCE			
Lumens	4500 / 5700 / 6900		
Lumens Per Watt (LPW)	150		
Color Temperature (CCT)	3500K / 4000K / 5000K		
Color Rendering (CRI)	83		
R9 (Red Value)	5		
Beam Angle	118°		
Light Distribution	Type VS		
BUG Rating (Backlight, Uplight, and Glare)	B2 - U1 - G1		
Dimmable Lighting Control	(Dimmable 0-10V, Range 10% - 100%		
ENVIRONMENT			
Operating Temperature	-40° ~ 113°F		
Suitable Location	DAMP		
Ingress Protection Rating	IP20		
Fixture Type	Enclosed		
LIFESPAN			
Average Life (Hours)	50,000		
Warranty (Years)	5		
COMPONENTS			
LED Light Source	2835		
Driver	937846		
CONSTRUCTION			
Housing	Plastic		
Base / Power Supply	Hard Wired		
QUALIFICATIONS			
Model Number	93784		


RoHS compliant

Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.

LMDX44 COMMERCIAL DUTY • 5YR LED SPEC-SELECT[™] SNAP & GO[™] MAGNETIC MODULES



MODULES	DRIVER
43.4"	14"
0.7"	1.2″
	0.8"
1.9	
	43.4" 0.7"

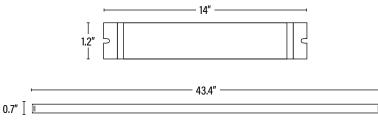

4 ea. Modules and 1 Driver

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	5	10811768020851		39.4
Individual Item	1	811768020854	N/A	N/A
Country of Origin	China			
HS Tariff	9405.11.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
LMDX44	LED SPEC-SELECT™ SNAP & GO™ MAGNETIC MODULES/30-38-46W/35-40-50K/DIMM/120-277V • 2X8FT - DLC ®	5
Manufactured by	2Q.L., Inc Manufacturer Model # 93784	
ACCESSORIES		
LMDX04	SINGLE FROSTED LENS FOR SPEC-SELECT™ SNAP & GO™ • 4FT OR 8FT	100