



LR6594 STANDARD • 5YR
LED CFL DIRECT INSTALL
FOUR PIN-BASE REPLACEMENT LAMPS FOR
CFLS - HORIZONTALLY-MOUNTED LAMPS

FEATURES


- PLUG & GO™ - works with compatible electronic ballast
- Easy installation
- Horizontal mounting

APPLICATION

Ideal for retrofitting 18W-42W 4 pin CFL G24 lamps frequently used in downlights and sconces.

**Not suitable for use with emergency ballast or signs.*

LIGHT DISTRIBUTION CURVE

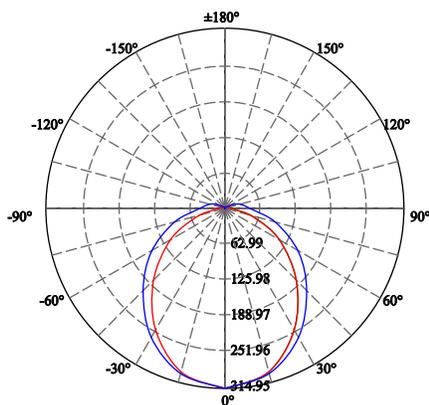

ELECTRICAL

	LAMP	SYSTEM POWER
Wattage	9W	11W
Voltage	120-277V	
Power Factor	0.87	
Total Harmonic Distortion (THD)	24.5	

LIGHTING PERFORMANCE

Lumens	850
Lumens Per Watt (Lm/W)	78
Color Temperature (CCT)	4000K
Color Rendering (CRI)	83
R9 (Red Value)	N/A
R13 (Skin Tones)	N/A
Beam Angle	120°
Light Distribution	Type VS
Dimmable Lighting Control	<i>Dimmable</i> with dimming ballast

ENVIRONMENT

Operating Temperature	-4° ~ 113°F
Suitable Location	DAMP
Ingress Protection Rating	IP20
Suitable Fixture Style	Enclosed

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	N/A
------------------	-----

CONSTRUCTION

Housing	PC
Base / Power Supply	G24q 4 Pin / Plug In
Finish	White

QUALIFICATIONS

Manufacturer Model #	90475
----------------------	-------




Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.

LR6594 STANDARD • 5YR LED CFL DIRECT INSTALL



DIMENSIONS (Inches)	
Length	5.2"
Width/Diameter	1.6"
Height	1"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

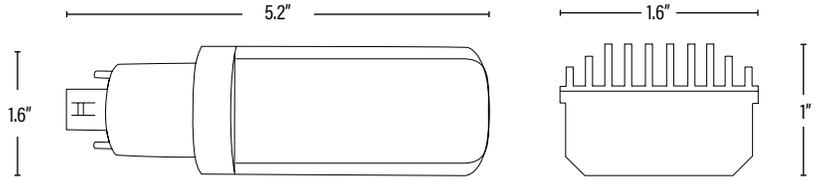

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	50	10811768027218	--	--
Inner Carton	10	20811768027215	--	--
Individual Box	1	811768027211	--	--
Country of Origin	China			
HS Tariff	9405.40.8200			

ORDERING

ITEM#	DESCRIPTION	CASE
LR6594	LED 9W/G24q/4 PIN/DI/40K/120-277V/H	10/50

Manufactured by P.Q.L., Inc. - Manufacturer Model # 90475

PERFORMANCE DATA

PACKAGING