



LRC125 LT. COMMERCIAL • 5YR LED HIGH WATTAGE 360° LAMP

REPLACEMENT LAMPS FOR OUTDOOR POLE/ARM
MOUNTED DECORATIVE LUMINAIRES (TYPE B)

FEATURES

- Uses patented remote activated phosphor technology which increases lifespan by reducing temperatures.
- More consistent light output and color stability.
- High lumen output.
- 360° optical design that provides even light distribution.
- Surge Protection (5KV).
- Replaces high pressure sodium metal halide lamps.

APPLICATION


Replacement lamps for top post, high bays, parking lots and street lighting.

**Not suitable for use with emergency fixtures.*

ELECTRICAL

Wattage	12W
Voltage	120-277V
Current	0.11A
Power Factor	0.9
Total Harmonic Distortion (THD)	--

LIGHTING PERFORMANCE

Lumens	1740
Lumens Per Watt (Lm/W)	145
Color Temperature (CCT)	5000K
Color Rendering (CRI)	80
R9 (Red Value)	5
R13 (Skin Tones)	83
Beam Angle	270°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B1 - U3 - G1
Dimmable Lighting Control	

ENVIRONMENT

Operating Temperature	-13° ~ 131°F
Suitable Location	DAMP
Ingress Protection Rating	IP64
Fixture Type	Enclosed

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	2835 LED
------------------	----------

CONSTRUCTION

Housing	Aluminum / PC
Lens	Yellow - Off / White - On
Base / Power Supply	E26 - Medium

QUALIFICATIONS

Manufacturer Model #	91801
----------------------	-------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.


LRC125 LT. COMMERCIAL • 5YR
LED HIGH WATTAGE 360° LAMP



DIMENSIONS (Inches)

Length (MOL)	5.6"
Width/Diameter (MOD)	2.6"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

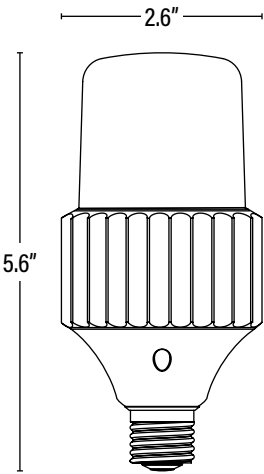

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	30	10811768025252	17.6" x 14.5" x 11"	16.9
Individual Box	1	811768025255	2.9" x 2.9" x 6.6"	0.6
Country of Origin	China			
HS Tariff	8539.50.0010			

ORDERING

ITEM#	DESCRIPTION	CASE
LRC125	LED 12WT21/360°/50K/MED/120-277V	30

Manufactured by P.Q.L., Inc. - Manufacturer Model # 91801

PERFORMANCE DATA

PACKAGING