

## LS2093 LT. COMMERCIAL • 5YR LED SURFACE MOUNT

LUMINARIES FOR COMMERCIAL AND  
RESIDENTIAL BUILDINGS


### FEATURES

- LED surface mount fixture provides glare free illumination and even light distribution with a clean, modern look.
- Diffusing lens
- Low profile design
- Easy installation for J-Box.

### APPLICATION

Ideal for retrofitting inefficient fixtures in malls, hospitals, airports, offices, hallways, lobbies and other residential and commercial applications.

### LIGHT DISTRIBUTION CURVE

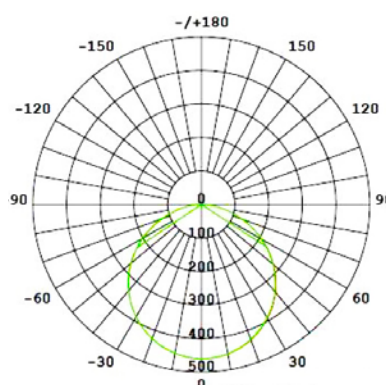

### ELECTRICAL

Wattage	20W
Voltage	120V
Current	174mA
Power Factor	0.9
Total Harmonic Distortion (THD)	8.3

### LIGHTING PERFORMANCE

Lumens	1200
Lumens Per Watt (Lm/W)	60
Color Temperature (CCT)	3000K
Color Rendering (CRI)	92
R9 (Red Value)	61
R13 (Skin Tones)	N/A
Beam Angle	112°
Light Distribution	Type VS
Dimmable Lighting Control	<i>Dimmable</i> see compatibility report

### ENVIRONMENT

Operating Temperature	-22° ~ 104°F
Suitable Location	<b>WET</b> Indoor / Covered Ceilings
Ingress Protection Rating	IP54

### LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	<b>5</b>

### COMPONENTS

LED Light Source	Smalite 2835
------------------	--------------

### CONSTRUCTION

Housing	PC
Base / Power Supply	Hard Wired
Finish	White

### QUALIFICATIONS

Manufacturer Model #	83889
----------------------	-------



Manufactured by P.Q.L., Inc. • Visit [www.energystar.gov](http://www.energystar.gov) to confirm qualification. • Published lumens on LED products are approximate and may vary slightly.


LS2093 LT. COMMERCIAL • 5YR  
LED SURFACE MOUNT



DIMENSIONS (Inches)

Length (MOL)	9"
Width/Diameter (MOD)	9"
Height	1"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

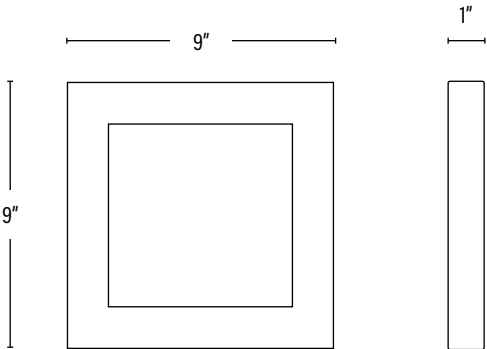

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	10	10811768029717	--	--
Individual Box	1	811768029710	9.3" x 2.4" x 9.4"	--
Country of Origin	China			
HS Tariff	9405.40.6000			

ORDERING

ITEM#	DESCRIPTION	CASE
LS2093	LED 20W DESIGNER SURFACE MOUNTED/9" SQUARE/WHITE/30K/DIMMABLE ENERGY STAR®	10

Manufactured by P.Q.L., Inc. - Manufacturer Model # 83889 - Visit [www.energystar.gov](http://www.energystar.gov) to confirm qualification.

ADDITIONAL INFORMATION:

Not compatible for installation in recessed cans.

PERFORMANCE DATA

PACKAGING