



**LTX424** COMMERCIAL DUTY • 5YR  
**LED 2X4 SPEC-SELECT™**  
**CENTER BASKET TROFFER**  
2X4 LUMINARIES FOR AMBIENT LIGHTING OF  
INTERIOR COMMERCIAL SPACES

**FEATURES**

Spec-Select™ Troffers feature adjustable wattage and color temperature for the perfect balance of light in any application.

- Energy efficient
- No flickering

**APPLICATION**

Ideal for retrofitting inefficient fixtures in malls, hospitals, airports, offices, lobbies and other residential and commercial applications.

**ELECTRICAL**

Wattage	34W / 38W / 45W
Voltage	120-277V
Current	0.38-0.16A
Power Factor	0.9
Total Harmonic Distortion (THD)	10

**LIGHTING PERFORMANCE**

Lumens	4488-5715
Lumens Per Watt (Lm/W)	127
Color Temperature (CCT)	3500K / 4100K / 5000K
Color Rendering (CRI)	82
R9 (Red Value)	6 / 11 / 8
R13 (Skin Tones)	81 / 83 / 82
Beam Angle	100°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B2 - U2 - G1
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

**ENVIRONMENT**

Operating Temperature	-4 ~ 122°F
Suitable Location	<b>DAMP</b>
Ingress Protection Rating	IP40

**LIFESPAN**

Average Life (Hours)	50,000
Warranty (Years)	<b>5</b>

**COMPONENTS**

LED Light Source	Seoul 3528
Driver	SIP50-I1000

**CONSTRUCTION**

Housing	Aluminum
Lens	Frosted
Base / Power Supply	Hard Wired
Finish	White

**QUALIFICATIONS**

Model Number	55602
--------------	-------




*Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.*

# LTX424 COMMERCIAL DUTY • 5YR LED 2X4 SPEC-SELECT™ CENTER BASKET TROFFER



ITEM INFORMATION

DIMENSIONS (Inches)	
Length	47.8"
Width	23.8"
Height	2.8"
Net Weight (Lbs)	12.8

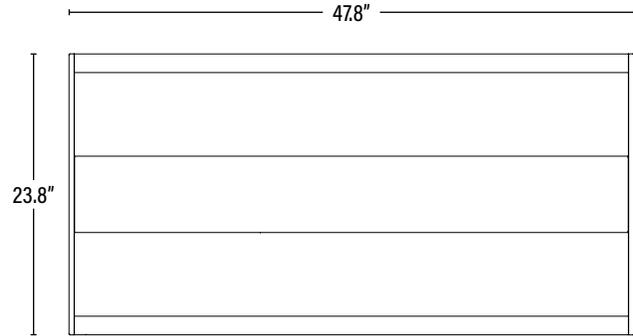

PACKAGING	UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	49.2" x 24.4" x 3.5"	21.2
Country of Origin	China		
HS Tariff	9405.10.6020		

ITEM#	DESCRIPTION	CASE
LTX424	LED 2X4 SPEC-SELECT™ CENTER BASKET TROFFER/34-38-45W/35-50K/DIMM/120-277V	1

Manufactured by P.Q.L., Inc. - Manufacturer Model # 55602

**ADDITIONAL INFORMATION:**

- Default settings; 45W, 5000K.
- The color temperature and wattage may be adjusted by two slide switches integrated into the driver. The color temperature and wattage should be selected prior to installation.

