



CFC404 XTREME DUTY • 7YR
LED CANOPY
PARKING GARAGE LUMINAIRES

FEATURES

- Ultra-thin design.
- Replaces 100-175W MH.

HOUSING

- One piece sealed die cast housing.
- Heat resistant polycarbonate optical lens.

MOUNTING

- Surface Mount with J-Box.
- Pendant with 3/4" conduit.

APPLICATION

Parking structures and storage areas.

ELECTRICAL

Wattage	40W
Voltage	120-277V
Current	0.34A
Power Factor	0.9
Total Harmonic Distortion (THD)	15

LIGHTING PERFORMANCE

Lumens	5350
Lumens Per Watt (Lm/W)	134
Color Temperature (CCT)	4000K
Color Rendering (CRI)	70
R9 (Red Value)	-23
R13 (Skin Tones)	71
Beam Angle	160°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B2 - U2 - G2

Dimmable Lighting Control



ENVIRONMENT

Operating Temperature	-40° ~ 104°F
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	7

COMPONENTS

LED Light Source	Luxeon 3030 2D
Driver	LED-DR-50-W-XXX

CONSTRUCTION

Housing	Aluminum
Lens	PC
Base / Power Supply	Hard Wired
Finish	Black

QUALIFICATIONS

Manufacturer Model #	83338
----------------------	-------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.

CFC404 XTREME DUTY • 7YR LED CANOPY




ITEM INFORMATION

DIMENSIONS (Inches)

Length	9.5"
Width/Diameter	9.5"
Height	3.2"
Weight (Lbs)	4.2

Line drawings may not be to scale and are for general reference only.

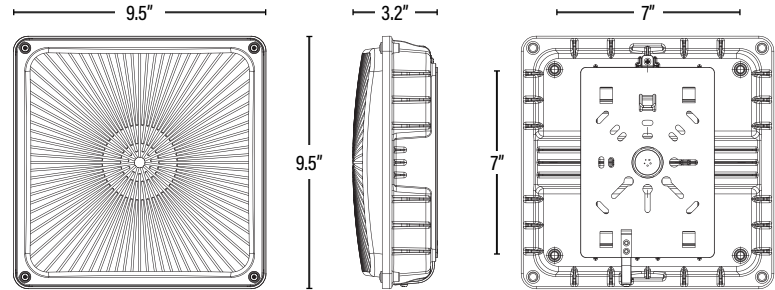

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	6	10899645001544	--	--
Individual Box	1	899645001547	--	--
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
CFC404	LED CANOPY 40W/40K/120-277V/BLACK/V3	6

Manufactured by P.Q.L., Inc. - Manufacturer Model # 83338

ADDITIONAL INFORMATION:

- Driver will reset if there is a loss in voltage or power failure.

Note: To prevent water damage which may shorten the life of an exterior mounted fixture; the fixture should be properly weather sealed according to the installation instructions or between the fixture base and mounting surface. Damage due to improper installation may void the warranty.