



CWPX60 XTREME DUTY • 7YR
LED SPEC-SELECT™ WALL PACK
OUTDOOR NON-CUTOFF AND SEMI-CUTOFF
WALL-MOUNTED AREA LUMINARIES

FEATURES

- Adjustable wattage and color temperature.
- Replaces traditional HID wall packs.
- Durable, die casting housing.
- Powder coat finish, corrosion and weather resistant.
- Sealed to keep out moisture and environmental contaminants.

APPLICATION

Ideal for security, walkways and perimeter lighting.

ELECTRICAL

Wattage	40W / 50W / 60W
Voltage	120-277V
Power Factor	0.9
Total Harmonic Distortion (THD)	--

LIGHTING PERFORMANCE

Lumens	5000-7500
Lumens Per Watt (LPW)	125
Color Temperature (CCT)	3000K / 4000K / 5000K
Color Rendering (CRI)	80
R9 (Red Value)	--
R13 (Skin Tones)	--
Beam Angle	110° x 105°
Light Distribution	--
BUG Rating (Backlight, Uplight, and Glare)	--
Dimmable Lighting Control	

ENVIRONMENT

Operating Temperature	-40° ~ 104°F
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	7

COMPONENTS

LED Light Source	--
Driver	ARC-DI-60I1450

CONSTRUCTION

Housing	Die Cast Aluminum
Lens	Tempered Glass
Base / Power Supply	Hard Wired
Finish	Bronze

QUALIFICATIONS

Model Number	SSWP-B-FSC1-1-MV-BRZ
--------------	----------------------



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.


**CWPX60 XTREME DUTY • 7YR
LED SPEC-SELECT™ WALL PACK**



ITEM INFORMATION

DIMENSIONS (Inches)

Length	14.2"
Width	7.7"
Height	9.1"
Net Weight (Lbs)	--

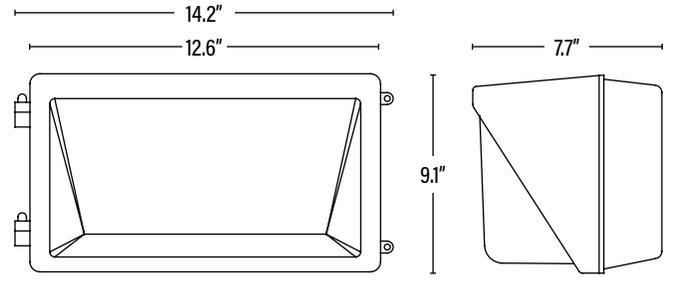

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	811768022834	15.4" x 10.6" x 9.4"	9.3
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
CWPX60	LED SPEC-SELECT™ WALL PACK/40-50-60W/30-50K/120-277V/BRZ	1

Manufactured by P.Q.L., Inc. - Manufacturer Model # SSWP-B-FSC1-1-MV-BRZ

ADDITIONAL INFORMATION:

Note: To prevent water damage which may shorten the life of an exterior mounted fixture; the fixture should be properly weather sealed according to the installation instructions or between the fixture base and mounting surface. Damage due to improper installation may void the warranty.